



R系列斜齿轮硬齿面减速机




R系列减速机有以下设计方案：




R...Y...
底脚轴伸式安装斜齿轮减速机




RF...Y...
法兰轴伸式安装斜齿轮减速机




RD (双轴型) ...
底脚轴伸式安装, 轴输入的斜齿轮减速机




RFD (双轴型) ...
法兰轴伸式, 轴输入的斜齿轮减速机

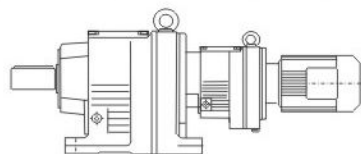


R...R...Y...
底脚轴伸式安装组合型斜齿轮减速机

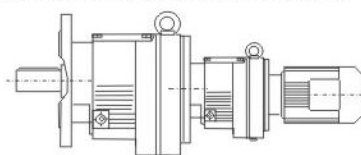


RF...R...Y...
法兰轴伸式组合型斜齿轮减速机




R...R...
底脚轴伸式安装组合型, 轴输入的斜齿轮减速机




RF...R...
法兰轴伸式组合型, 轴输入的斜齿轮减速机




RX...Y...
底脚轴伸式安装单级斜齿轮减速机




RXF...Y...
法兰轴伸式安装单级斜齿轮减速机



RXD (双轴型) ...
底脚轴伸式安装, 轴输入的单级斜齿轮减速机



RXFD (双轴型) ...
法兰轴伸式, 轴输入的单级斜齿轮减速机




R (RF, RX, RXF) ...ZP...
电机用户自配或配特殊电机时




R 系列斜齿轮硬齿面减速机


型号与标记:

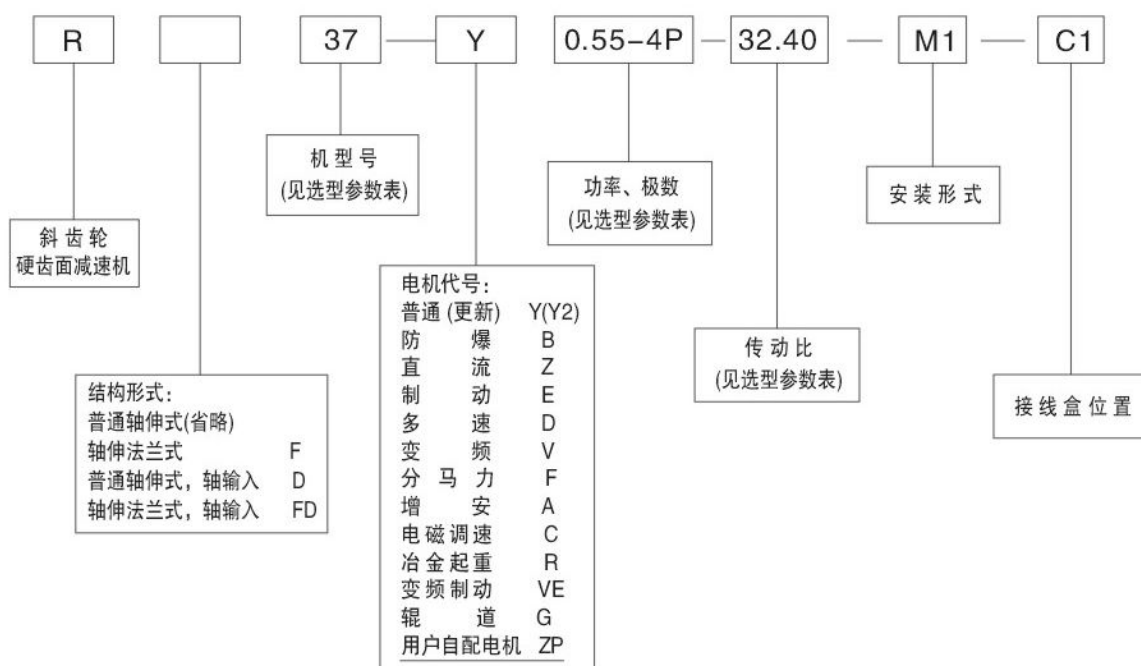

安装形式:

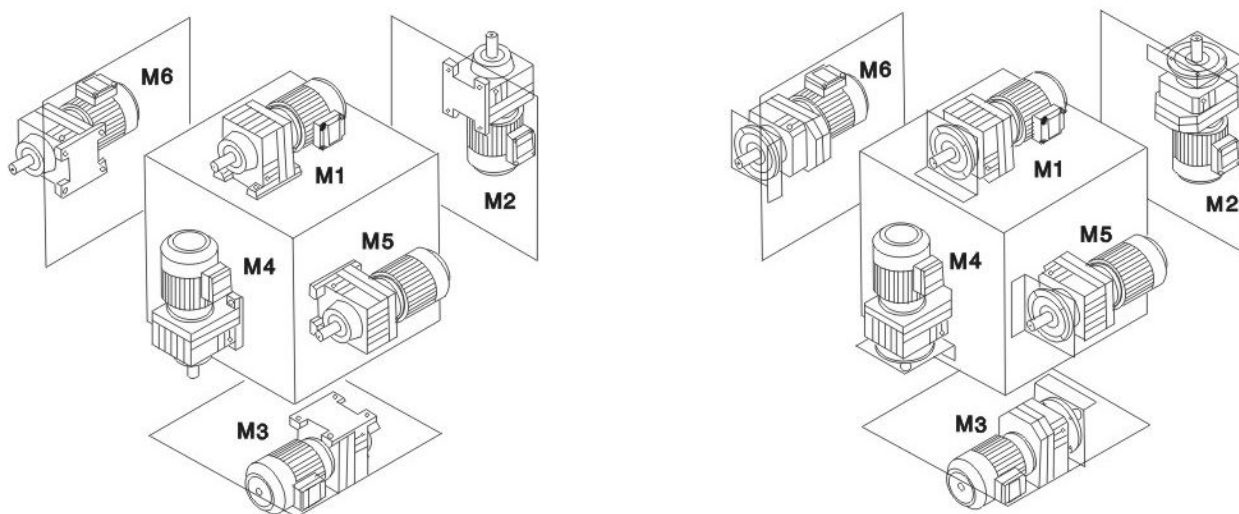

电机接线盒位置:

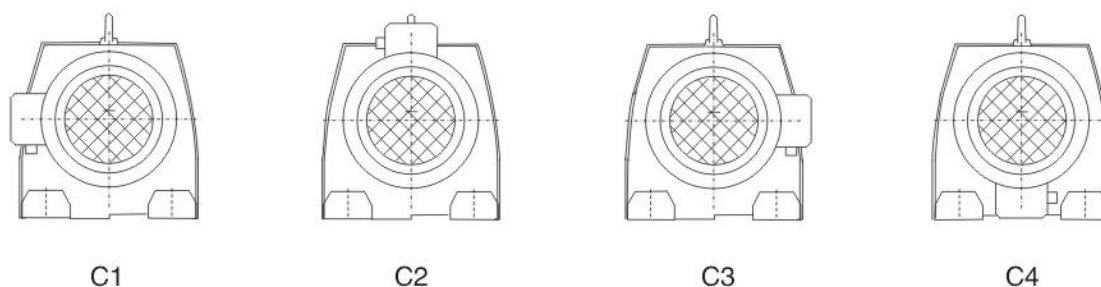

R 系列斜齿轮硬齿面减速机



输入功率及许用转矩

机 型 号	17	27	37	47	57	67	77	87	97	107	137	147	167
结构形式	R							RF					
输入功率 (KW)	0.18~0.75	0.18~3	0.18~3	0.18~5.5	0.18~7.5	0.18~7.5	0.18~11	0.55~18.5	0.55~30	2.2~45	5.5~55	11~90	11~160
传 动 比	3.83~74.84	3.37~135.09	3.33~134.82	3.83~176.88	4.39~186.89	4.29~199.81	5.21~195.24	5.36~246.54	4.49~289.74	5.06~249.16	5.15~222.60	5.00~163.31	10.24~229.71
许用转矩 (N.m)	85	130	200	300	450	600	820	1550	3000	4300	8000	13000	18000


机 型 号	37	57	67	77	87	97	107	127	157
结构形式	RX					RXF			
输入功率 (KW)	0.18~1.1	0.18~5.5	0.18~7.5	1.1~11	3~22	5.5~30	7.5~45	7.5~90	11~132
传 动 比	1.62~4.43	1.3~5.5	1.4~6.07	1.42~8.00	1.39~8.65	1.42~8.23	1.44~6.63	1.51~6.2	1.57~6.2
许用转矩 (N.m)	20	70	135	215	400	600	830	1110	1680

减速机重量

机 型 号	R17	R27	R37	R47	R57	R67	R77	R87	R97	R107	R137	R147	R167
重量 (kg)	4	5.5	8.5	10	18	25	36	63	101	153	220	400	700
机 型 号	RX37	RX57	RX67	RX77	RX87	RX97	RX107	RX127	RX157				
重量 (kg)	5	8	14	23	39	70	100	150	250				

所注重量为平均值，仅供参考

产品结构示意图

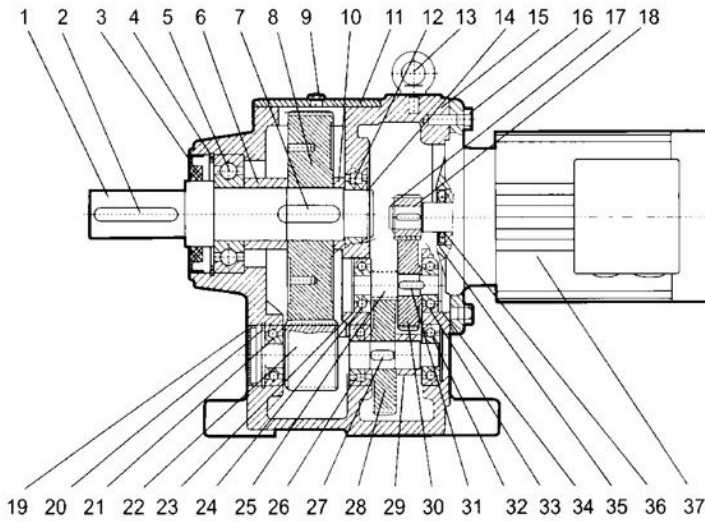

- 1、输出轴

2、平键I

3、输出轴油封

4、孔用挡圈I

5、轴承I

6、轴套I

7、平键II

8、齿轮III

9、通气帽

10、轴套II

11、盖

12、轴承II

13、吊环

14、轴用挡圈I

15、箱体

16、螺栓

17、轴用挡圈II

18、输入齿轮
- 19、封盖

20、孔用挡圈II

21、轴承III

22、齿轮轴III

23、孔用挡圈III

24、轴承V

25、齿轮轴II

26、轴承V

27、平键III

28、齿轮II

29、轴套III

30、齿轮I

31、平键IV

32、轴承VI

33、轴承VII

34、孔用挡圈IV

35、电机油封

36、电机轴承

37、电机



R 系列斜齿轮硬齿面减速机

润滑油量表

机 型 号	润 滑 油 量 (升)					
	M1 1)	M2 1)	M3	M4	M5	M6
R17	0.25	0.6	0.35	0.6	0.35	0.35
R27	0.25/0.4	0.7	0.4	0.7	0.4	0.4
R37	0.3/1	0.9	1	1.1	0.8	1
R47	0.7/1.5	1.6	1.5	1.7	1.5	1.5
R57	0.8/1.7	1.9	1.7	2.1	1.7	1.7
R67	1.1/2.3	2.6/3.5	2.8	3.2	1.8	2
R77	1.2/3	3.8/4.3	3.6	4.3	2.5	3.4
R87	2.3/6	6.7/8.4	7.2	7.7	6.3	6.5
R97	4.6/9.8	11.7/14	11.7	13.4	11.3	11.7
R107	6/13.7	16.3	16.9	19.2	13.2	15.9
R137	10/25	28	29.5	31.5	25	25
R147	15.4/40	46.5	48	52	39.5	41
R167	27/70	82	78	88	66	69

机 型 号	润 滑 油 量 (升)					
	M1 1)	M2 1)	M3	M4	M5	M6
RF17	0.25	0.6	0.35	0.6	0.35	0.35
RF27	0.25/0.4	0.7	0.4	0.7	0.4	0.4
RF37	0.4/1	0.9	1	1.1	0.8	1
RF47	0.75/1.5	1.6	1.5	1.7	1.5	1.5
RF57	0.8/1.7	1.8	1.7	2	1.7	1.7
RF67	1.2/2.5	2.7/3.6	2.7	3.1	1.9	2.1
RF77	1.2/2.6	3.8/4.1	3.3	4.1	2.4	3
RF87	2.4/6	6.8/7.9	7.1	7.7	6.3	6.4
RF97	5.1/10.2	11.9/14	11.2	14	11.2	11.8
RF107	6.3/14.9	15.9	17	19.2	13.1	15.9
RF137	9.5/25	27	29	32.5	25	25
RF147	16.4/42	47	48	52	42	42
RF167	26/70	82	78	88	65	71

机 型 号	润 滑 油 量 (升)					
	M1	M1	M3	M4	M5	M6
RX37/RXF37	0.45/0.4	0.6	1.1/0.9	1.1/0.9	0.7/0.6	0.7/0.6
RX57/RXF57	0.6/0.5	0.8	1.3/1.1	1.3/1.1	0.9/0.7	0.9/0.7
RX67/RXF67	0.8/0.7	0.8	1.7/1.5	1.9/1.7	1.1/1	1.1/1
RX77/RXF77	1.1/0.9	1.5	2.6/2.4	2.7/2.5	1.6	1.6
RX87/RXF87	1.7/1.6	2.5	4.8/4.9	4.8/4.7	2.9	2.9
RX97/RXF97	2.1	3.4/3.6	7.4/7.1	7	4.8	4.8
RX107/RXF107	3.9/3.1	5.6/5.9	11.6/11.2	11.9/10.5	7.7/7.2	7.7/7.2
RX127/RXF127	5.6/5.9	11.6/11.2	21.9/20.5	22.7/22.2	9.7/9.2	9.7/9.2
RX157/RXF157	11.6/11.2	21.9/20.5	31.3/30.5	32.7/32.2	13.2/12.7	13.2/12.7

注：1) 表示减速机为组合型时低速级所加油量为大值。

R系列斜齿轮硬齿面减速机



输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f _B	机 型 号 Type	极 数 P	输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f _B	机 型 号 Type	极 数 P
0.18KW						0.18KW					
0.16	9293	8443	1.31	R 147R77 RF147R77	4	1.6	944	858	0.82	R 77R37 RF77R37	4
0.19	8042	7307	1.52			1.8	833	757	0.93		
0.22	7096	6447	1.72			2.1	739	671	1.04		
0.25	6128	5568	1.99			2.4	628	571	1.23		
0.29	5300	4815	2.31			1.7	904	821	0.85		
0.32	4760	4325	2.57			1.9	803	730	0.96		
0.38	4038	3669	3.03			2.2	711	646	1.08		
0.43	3553	3228	3.44			2.5	602	547	1.28		
0.16	9668	8784	0.8	R 137R77 RF137R77	4	2.9	525	477	1.47	R 67R37 RF67R37	4
0.19	8232	7479	0.91			3.3	469	426	1.64		
0.22	7057	6412	1.07			3.8	402	365	1.92		
0.24	6421	5834	1.17			4.5	341	310	2.26		
0.28	5504	5001	1.37			2.4	628	571	0.90		
0.32	4803	4364	1.57			2.9	535	486	1.05		
0.35	4323	3928	1.74			2.5	617	561	0.91		
0.30	5183	4709	1.45			2.9	532	483	1.06		
0.35	4422	4018	1.70			3.2	482	438	1.17		
0.40	3868	3514	1.94			3.6	427	388	1.32		
0.42	3674	3338	2.05	R 107R77 RF107R77	4	4.1	370	336	1.53	R 57R37 RF57R37	4
0.47	3224	2929	2.33			4.8	316	287	1.79		
0.31	4881	4435	0.83			5.5	281	255	2.01		
0.36	4288	3896	0.94			3.1	488	443	0.87		
0.46	3345	3039	1.21			3.4	451	410	0.94		
0.36	4260	3870	0.95			3.0	518	471	0.82		
0.42	3634	3302	1.11			3.9	393	357	1.08		
0.46	3299	2997	1.23			4.4	351	319	1.20		
0.53	2885	2621	1.40			5.2	294	267	1.44		
0.62	2479	2252	1.63			5.8	265	241	1.59		
0.68	2246	2041	1.80	R 97R57 RF97R57	4	6.5	237	215	1.79	R 47R37 RF47R37	4
0.71	2169	1971	1.83			3.9	395	359	1.07		
0.77	1995	1813	2.03			4.3	357	324	1.19		
0.88	1747	1587	2.31			4.8	319	290	1.33		
1.0	1529	1389	2.64			5.3	288	262	1.47		
1.1	1338	1216	3.02			5.7	271	246	1.56		
0.52	2937	2668	0.96			6.3	242	220	1.75		
0.62	2471	2245	1.14			7.4	207	188	2.04		
0.69	2219	2016	1.27			8.7	175	159	2.42		
0.80	1907	1733	1.48			4.6	331	301	0.85	R 37R17 RF37R17	4
0.86	1786	1623	1.58	R 87R57 RF87R57	4	5.5	281	255	1.00		
0.97	1578	1434	1.79			6.1	251	228	1.12		
1.2	1328	1207	2.12			7.1	215	195	1.31		
1.3	1193	1084	2.36			7.0	219	199	0.86		
1.5	1028	934	2.74			8.9	173	157	1.09		
1.6	966	878	2.92			9.3	165	150	1.14		
1.8	831	755	3.39			6.2	249	226	0.8		
0.51	2996	2722	0.94			6.9	222	202	0.85		
0.60	2544	2311	1.11			7.8	197	179	0.95		
0.67	2287	2078	1.23			8.9	172	156	1.09		
0.80	1907	1733	0.8	R 77 RF77	6	9.9	155	141	0.8	R 27R17 RF27R17	4
0.93	1639	1489	0.89			11	136	124	0.90		
1.0	1535	1395	0.95			13	121	110	1.01		
1.1	1356	1232	1.07			15	103	94	1.18		
1.2	1260	1145	1.16			10	149	135	0.82		
1.3	1141	1037	1.28			12	130	118	0.94		
1.5	1025	931	1.42			13	114	104	1.07		
1.7	883	802	1.65			15	99	90	1.23		
0.80	1912	1737	0.8			4.4	371	195.24	2.1		
0.91	1677	1524	0.87			5.1	317	166.59	2.4		
1.1	1434	1303	1.02	R 77 RF77	6	5.8	277	145.67	2.8		
1.2	1258	1143	1.16			6.1	263	138.39	2.9		
1.6	972	883	1.50			7.0	231	121.42	3.3		
1.8	852	774	1.71								



R 系列斜齿轮硬齿面减速机

输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f _B	机 型 号 Type	极 数 P	输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f _B	机 型 号 Type	极 数 P
0.18KW						0.18KW					
7.1	227	195.24	3.4	R 77 RF77	4	11	144	123.91	0.85	R 27 RF27	4
8.3	194	166.59	4.0		4	13	123	105.49	1.00		
9.5	169	145.67	4.6		4	15	106	90.96	1.16		
10	161	138.39	4.8		4	16	99	84.78	1.24		
4.3	380	199.81	1.48	R 67 RF67	6	19	86	74.11	1.42		
4.6	350	184.07	1.61			20	81	69.47	1.51		
5.4	301	158.14	1.88			23	71	61.30	1.71		
6.2	262	137.67	2.2			25	65	55.87	1.88		
6.6	245	128.97	2.3			29	56	48.17	2.2		
7.5	217	113.94	2.6			31	52	44.90	2.3		
8.0	201	105.83	2.8			35	46	39.25	2.7		
8.9	182	95.91	3.1			38	44	36.79	2.8		
9.9	164	86.11	3.4			43	39	32.47	3.2		
11	141	74.17	4.0			48	34	28.78	3.6		
12	133	69.75	4.3			57	29	24.47	4.2		
7.0	232	199.81	2.4	R 67 RF67	4	49	34	28.37	3.6		
7.6	214	184.07	2.6			53	31	26.09	3.9		
8.8	184	158.14	3.1			62	26	22.32	4.6		
10	160	137.67	3.5			72	23	19.35	5.3		
11	150	128.97	3.8			77	21	18.08	5.7		
12	132	113.94	4.3			89	19	15.63	6.6		
13	123	105.83	4.6			105	16	13.28	7.8		
4.5	355	186.89	1.19	R 57 RF57	6	37	45	23.13	1.78	R 17 RF17	6
4.9	327	172.17	1.29			40	41	21.22	1.94		
5.7	281	147.92	1.50			47	35	18.06	2.28		
6.6	245	128.77	1.73			19	87	74.84	0.92	R 17 RF17	4
7.0	229	120.63	1.84	R 57 RF57	4	22	75	64.52	1.07		
7.4	217	186.89	1.95			23	70	60.14	1.14		
8.1	200	172.17	2.1			26	61	52.57	1.31		
9.4	172	147.92	2.5			28	57	49.28	1.39		
11	150	128.77	2.8			32	51	43.49	1.58		
12	140	120.63	3.0			34	47	40.49	1.70		
13	124	106.58	3.4			39	41	35.40	1.94		
14	115	98.99	3.7			42	39	33.18	2.07		
15	104	89.71	4.1			47	34	29.28	2.3		
7.9	206	176.88	1.37	R 47 RF47	4	54	30	25.96	2.6		
8.5	189	162.94	1.49			60	27	23.13	2.9		
9.9	163	139.99	1.73			63	26	22.06	3.1		
11	142	121.87	1.99			66	25	21.22	3.2		
12	133	114.17	2.1			77	21	18.06	3.7		
14	117	100.86	2.4			89	18	15.57	4.3		
15	109	93.68	2.6			96	17	14.52	4.6		
16	99	84.90	2.9			110	15	12.69	5.3		
18	89	76.23	3.2			117	14	11.89	5.7		
6.9	235	123.66	0.80	R 37 RF37	6	132	12	10.5	6.1		
8.1	200	105.28	0.94			149	11	9.31	6.5		
9.4	173	90.77	1.09			176	9	7.91	7.2		
10	161	84.61	1.17			184	9	7.55	5.9		
10	157	134.82	1.20	R 37 RF37	4	197	8	7.04	6.2		
11	144	123.66	1.31			226	7	6.15	7.0		
13	122	105.28	1.54			241	7	5.76	7.3		
15	106	90.77	1.78			273	6	5.09	7.9		
16	98	84.61	1.91			308	5	4.51	8.4		
19	86	73.96	2.2			363	4.5	3.83	10		
20	81	69.33	2.3			140	12	6.07	3.4	RX 67 RXF67	6
23	71	61.18	2.6			164	10	5.18	6.9		
25	65	55.76	2.9			188	9.0	4.53	8.6		
29	56	48.08	3.4			198	8.5	4.30	8.8		

R系列斜齿轮硬齿面减速机



输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f _B	机 型 号 Type	极 数 P	输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f _B	机 型 号 Type	极 数 P
0.18KW						0.25KW					
229	7.4	6.07	5.5			0.69	3082	2016	0.92		
268	6.3	5.18	11			0.80	2649	1733	1.06		
307	5.5	4.53	14			0.86	2481	1623	1.14		
323	5.2	4.30	14			0.76	2787	1823	1.01		
369	4.6	3.77	18	RX 67	4	0.88	2420	1583	1.17	R 97R57	4
434	3.9	3.20	24	RXF67	4	1.0	2134	1396	1.32	RF97R57	4
481	3.5	2.89	28			1.1	1877	1228	1.50		
547	3.1	2.54	36			1.3	1633	1068	1.73		
579	2.9	2.40	40			1.5	1432	937	1.97		
681	2.5	2.04	51			1.7	1260	824	2.2		
						1.9	1127	737	2.5		
						2.2	965	631	2.9		
155	11	5.50	3.36			1.2	1750	1145	0.83		
168	10	5.07	3.37	RX 57	6	1.3	1585	1037	0.92		
195	8.6	4.35	7.4	RXF57	6	1.5	1423	931	1.02		
224	7.5	3.79	8.5			1.7	1226	802	1.19		
253	6.7	5.50	5.50			1.2	1747	1143	0.83		
274	6.1	5.07	5.51			1.6	1350	883	1.08	R 87R57	4
320	5.3	4.35	12			1.8	1183	774	1.23	RF87R57	4
367	4.6	3.79	14			2.0	1044	683	1.40		
392	4.3	3.55	15			2.3	916	599	1.59		
443	3.8	3.14	16	RX 57	4	2.6	803	525	1.82		
478	3.5	2.91	18	RXF57	4	3.1	694	454	2.1		
527	3.2	2.64	20			5.2	408	267	3.6		
586	2.9	2.37	23			2.4	873	571	0.88		
681	2.5	2.04	26			2.5	836	547	0.92		
724	2.3	1.92	28			2.9	729	477	1.06		
842	2.0	1.65	32			3.3	651	426	1.18		
						3.8	556	364	1.39	R 77R37	4
527	3	2.64	4.69	RX 37	4	4.5	477	312	1.62	RF77R37	4
426	4	3.26	3.80	RXF37	4	4.5	474	310	1.63		
						5.6	379	248	2.03		
						6.3	335	219	2.3		
0.25KW						3.6	593	388	0.95		
0.14	14894	9743	0.82			4.1	514	336	1.10		
0.16	12907	8443	0.95			4.8	439	287	1.29		
0.19	11170	7307	1.09			5.5	390	255	1.45		
0.22	9855	6447	1.24	R 147R77	4	6.1	350	229	1.61		
0.25	8512	5568	1.44	RF147R77	4	7.1	298	195	1.89		
0.29	7361	4815	1.66			8.1	263	172	2.15	R 67R37	4
0.32	6612	4325	1.85			9.0	235	154	2.40	RF67R37	4
0.38	5609	3669	2.18			3.6	587	384	0.96		
0.43	4935	3228	2.48			3.9	549	359	1.03		
0.49	4331	2833	2.82			4.5	474	310	1.19		
0.24	8918	5834	0.84			5.3	404	264	1.40		
0.28	7645	5001	0.98			5.9	359	235	1.57		
0.32	6671	4364	1.13			6.9	307	201	1.84		
0.35	6005	3928	1.25			7.7	277	181	2.0		
0.30	7199	4709	1.04			4.4	488	319	0.87		
0.35	6142	4018	1.22	R 137R77	4	5.2	408	267	1.04		
0.40	5372	3514	1.40	RF137R77	4	5.8	368	241	1.15		
0.42	5103	3338	1.47			6.5	329	215	1.29		
0.47	4478	2929	1.68			7.6	280	183	1.51		
0.52	4063	2658	1.85			8.6	246	161	1.72		
0.58	3687	2412	2.0			10	211	138	2.0	R 57R37	4
0.67	3169	2073	2.4			4.3	495	324	0.85	RF57R37	4
0.76	2811	1839	2.7			4.8	443	290	0.95		
0.99	2136	1397	3.5			5.3	401	262	1.06		
1.1	1874	1226	4.0			5.7	376	246	1.12		
						6.3	336	220	1.26		
0.46	4609	3015	0.88			6.1	349	228	0.81		
0.46	4581	2997	0.88			7.1	298	195	0.95	R 47R37	4
0.71	3013	1971	1.34			7.6	278	182	1.01	RF47R37	4
0.77	2772	1813	1.46	R 107R77	4	9.0	235	154	1.20		
0.88	2426	1587	1.67	RF107R77	4						
1.0	2123	1389	1.90								
1.1	1859	1216	2.2								
1.5	1417	927	2.9								
1.7	1241	812	3.3								



R 系列斜齿轮硬齿面减速机

输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f _B	机 型 号 Type	极 数 P	输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f _B	机 型 号 Type	极 数 P
0.25KW						0.25KW					
9.3	229	150	0.82	R 37R17 RF37R17	4	7.4	308	186.89	1.37	R 57 RF57	4
11	199	130	0.95		4	8.1	284	172.17	1.49		4
11	190	124	0.99			9.4	244	147.92	1.73		
13	168	110	1.12			11	212	128.77	1.99		
15	144	94	1.31			12	199	120.63	2.1		
8.9	238	156	0.79			13	176	106.58	2.4		
10	206	135	0.91			14	163	98.99	2.6		
11	194	127	0.97			15	148	89.71	2.9		
13	159	104	1.18			17	133	80.55	3.2		
15	138	90	1.37			20	114	69.23	3.7		
2.2	1029	289.60	2.7	R 97 RF97	8	7.9	292	176.88	0.97	R 47 RF47	4
2.5	913	256.89	3.1		8	8.5	269	162.94	1.05		4
2.7	856	240.83	3.3			9.9	231	139.99	1.22		
3.0	767	215.94	3.7			11	201	121.87	1.40		
2.6	876	246.54	1.66	R 87 RF87	8	12	188	114.17	1.50		
3.0	769	216.54	1.89		8	14	166	100.86	1.70		
3.1	731	205.71	1.99			15	154	93.68	1.83		
3.5	646	181.77	2.3			16	140	84.90	2.0		
3.9	592	166.59	1.30	R 77 RF77	8	18	126	76.23	2.2		
4.4	518	145.67	1.49		8	20	113	68.54	2.5		
4.7	492	138.39	1.57			22	106	64.21	2.7		
5.3	431	121.42	1.79			25	94	56.73	3.0		
4.4	526	195.24	1.46	R 77 RF77	6	26	87	52.69	3.2	R 37 RF37	4
5.1	449	166.59	1.72		6	29	79	47.75	3.6		4
5.8	393	145.67	1.96			10	222	134.82	0.85		
7.1	322	195.24	2.4	R 77 RF77	4	11	204	123.66	0.92		
8.3	275	166.59	2.8		4	13	174	105.28	1.08		
9.5	240	145.67	3.2			15	150	90.77	1.26		
10	228	138.39	3.4			16	140	84.61	1.35		
11	200	121.42	3.8			19	122	73.96	1.54		
4.1	562	158.14	1.00	R 67 RF67	8	20	114	69.33	1.64		
4.7	489	137.67	1.15		8	23	101	61.18	1.86		
5.0	458	128.97	1.23			25	92	55.76	2.0		
5.7	405	113.94	1.39			29	79	48.08	2.4		
4.3	539	199.81	1.05	R 67 RF67	6	31	74	44.81	2.5	R 27 RF27	4
4.6	496	184.07	1.14		6	35	65	39.17	2.9		
5.4	426	158.14	1.32			38	61	36.72	3.1		
6.2	371	137.67	1.52			43	53	32.40	3.5		
6.6	348	128.97	1.62			16	140	84.78	0.87		
7.5	307	113.94	1.84			19	122	74.11	1.00		
8.0	285	105.83	1.98			20	115	69.47	1.07		
7.0	329	199.81	1.71	R 67 RF67	4	23	101	61.30	1.21		
7.6	304	184.07	1.86		4	25	92	55.87	1.33		
8.8	261	158.14	2.2			29	79	48.17	1.54		
10	227	137.67	2.5			31	74	44.90	1.65		
11	213	128.97	2.7			35	65	39.25	1.89		
12	188	113.94	3.0			38	61	36.79	2.0		
13	175	105.83	3.2			43	54	32.47	2.3		
14	158	95.91	3.6			48	47	28.78	2.6		
16	142	86.11	4.0	R 57 RF57	6	57	40	24.47	3.0		
4.5	504	186.89	0.84		6	49	47	28.37	2.6		
4.9	464	172.17	0.91			53	43	26.09	2.8		
5.7	399	147.92	1.06			62	37	22.32	3.3		
6.6	347	128.77	1.22			72	32	19.35	3.8		
7.0	325	120.63	1.30			77	30	18.08	4.1		
8.0	287	106.58	1.47			89	26	15.63	4.7		
8.6	267	98.99	1.58			105	22	13.28	5.6		
						117	20	11.86	6.2		
						137	17	10.13	6.9		
						148	16	9.41	7.4		
						170	13	8.16	8.1		
						182	13	7.63	8.4		
						211	11	6.59	9.2		
						248	9.0	5.60	10		
						278	8.2	5.00	11		
						326	7.0	4.27	12		
						348	7.0	4.00	12		
						412	6.0	3.37	13		

R系列斜齿轮硬齿面减速机



输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f _B	机 型 号 Type	极 数 P	输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f _B	机 型 号 Type	极 数 P
0.25KW						0.37KW					
26	87	52.57	0.92	R 17 RF17	4	0.19	16532	7307	0.8	R 147R77 RF147R77	4
28	81	49.28	0.98			0.22	14586	6447	0.84		
32	72	43.49	1.11			0.25	12597	5568	0.97		
34	67	40.49	1.20			0.29	10894	4815	1.12		
39	58	35.40	1.37			0.32	9785	4325	1.25		
42	55	33.18	1.46			0.38	8301	3669	1.47		
47	48	29.28	1.65			0.43	7303	3228	1.67		
54	43	25.96	1.87			0.49	6410	2833	1.91		
63	36	22.06	2.2			0.32	9873	4364	0.76	R 137R77 RF137R77	4
60	38	23.13	2.1			0.35	8887	3928	0.85		
66	35	21.22	2.3			0.35	9091	4018	0.83		
77	30	18.06	2.7			0.40	7950	3514	0.95		
89	26	15.57	3.1			0.42	7552	3338	1.00		
96	24	14.52	3.3			0.47	6627	2929	1.13		
110	21	12.69	3.8			0.56	5620	2484	1.34		
117	20	11.89	4.1			0.62	5072	2242	1.48		
132	17	10.5	4.4			0.52	6014	2658	1.25		
149	15	9.31	4.7			0.58	5457	2412	1.38		
176	13	7.91	5.2			0.67	4690	2073	1.60		
184	12	7.55	4.2			0.76	4161	1839	1.81		
197	12	7.04	4.5			0.99	3161	1397	2.4		
226	10	6.15	5.0			1.1	2774	1226	2.7		
241	9	5.76	5.2			1.3	2466	1090	3.0		
273	8	5.09	5.7			1.5	2152	951	3.5		
308	7	4.51	6.1			0.68	4618	2041	0.88	R 107R77 RF107R77	4
363	6	3.83	6.7			0.83	3785	1673	1.07		
140	16	6.07	2.5	RX 67 RXF67	6	0.91	3464	1531	1.17		
164	14	5.18	4.9			1.0	3145	1390	1.29		
188	12	4.53	6.2			1.2	2701	1194	1.50		
198	12	4.30	6.4			1.3	2360	1043	1.71		
229	10	6.07	4.0	RX 67 RXF67	4	0.71	4459	1971	0.91		
268	9	5.18	8.1			0.77	4102	1813	0.99		
307	8	4.53	10			0.88	3591	1587	1.13		
323	7	4.30	10			1.0	3143	1389	1.29		
369	6	3.77	13			1.1	2751	1216	1.47		
434	5	3.20	17			1.5	2097	927	1.93		
481	5	2.89	20			1.7	1837	812	2.2		
547	4	2.54	26			0.97	3244	1434	0.87	R 97R57 RF97R57	4
579	4	2.40	29			1.2	2731	1207	1.03		
681	3	2.04	37			1.3	2453	1084	1.15		
155	15	5.50	2.4	RX 57 RXF57	6	1.0	3158	1396	0.89		
168	14	5.07	2.4			1.1	2778	1228	1.02		
195	12	4.35	5.3			1.3	2416	1068	1.17		
224	10	3.79	6.2			1.5	2120	937	1.33		
253	9.3	5.50	4.0	RX 57 RXF57	4	1.7	1864	824	1.51		
274	8.5	5.07	4.0			1.9	1667	737	1.69		
320	7.3	4.35	9.0			2.2	1428	631	1.98		
367	6.4	3.79	10			3.2	973	430	2.9		
392	6.0	3.55	11			3.7	857	379	3.3		
443	5.3	3.14	12			4.1	760	336	3.7		
478	4.9	2.91	13			1.7	1814	802	0.80	R 87R57 RF87R57	4
527	4.4	2.64	15			1.8	1706	754	0.85		
586	4.0	2.37	16			2.1	1468	649	0.99		
681	3.4	2.04	19			1.8	1751	774	0.83		
724	3.2	1.92	20			2.0	1545	683	0.94		
842	2.8	1.65	23			2.3	1355	599	1.08		
370	6	3.76	2.37	RX 37 RXF37	4	2.6	1188	525	1.23		
426	5	3.26	2.73			3.1	1027	454	1.42		
456	5	3.05	2.92			5.2	604	267	2.4		
527	4	2.64	3.38			5.9	532	235	2.7		
621	4	2.24	3.98			2.6	1217	538	1.20		
695	3	2.00	4.46			2.9	1068	472	1.36		
813	3	1.71	5.21			3.5	905	400	1.61		
869	3	1.60	5.57			3.9	817	361	1.78		



R 系列斜齿轮硬齿面减速机

输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f_B	机 型 号 Type	极 数 P	输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f_B	机 型 号 Type	极 数 P
0.37KW						0.37KW					
3.3	964	426	0.80	R 77R37 RF77R37	4	6.6	503	128.77	0.84	R 57 RF57	6
3.8	824	364	0.94		4	7.0	471	120.63	0.90		6
4.3	740	327	1.04			8.0	416	106.58	1.02		
4.5	701	310	1.10			8.6	387	98.99	1.09		
5.6	561	248	1.37			7.4	447	186.89	0.95		
6.3	495	219	1.56			8.1	411	172.17	1.03	R 57 RF57	4
7.4	425	188	1.81			9.4	353	147.92	1.20		4
8.6	367	162	2.1			11	308	128.77	1.37		
9.8	321	142	2.4			12	288	120.63	1.47		
4.8	649	287	0.87	R 67R37 RF67R37	4	13	255	106.58	1.66		
5.5	577	255	0.98		4	14	237	98.99	1.79		
6.1	518	229	1.09			15	214	89.71	1.97		
7.1	441	195	1.28			17	192	80.55	2.2		
2.5	1323	256.89	2.1	R 97 RF97	8	20	165	69.23	2.6		
2.7	1240	240.83	2.3		8	21	155	64.85	2.7		
3.0	1112	215.94	2.5			24	137	57.29	3.1		
3.5	958	185.97	2.9			26	127	53.22	3.3		
2.9	1132	289.60	2.5	R 97 RF97	6	29	115	48.23	3.7		
3.3	1004	256.89	2.8		6	9.9	335	139.99	0.84	R 47 RF47	4
3.5	941	240.83	3.0			11	291	121.87	0.97		
3.9	844	215.94	3.3			12	273	114.17	1.03		
3.0	1115	216.54	1.31	R 87 RF87	8	14	241	100.86	1.17		
3.1	1059	205.71	1.38		8	15	224	93.68	1.26		
3.5	936	181.77	1.6			16	203	84.90	1.39		
3.4	963	246.54	1.51			18	182	76.23	1.55		
3.9	846	216.54	1.72	R 87 RF87	6	20	164	68.54	1.72		
4.1	804	205.71	1.81		6	22	153	64.21	1.84		
4.7	710	181.77	2.1			25	136	56.73	2.1		
5.5	607	155.34	2.4			26	126	52.69	2.2		
6.0	556	142.41	2.6			29	114	47.75	2.5		
4.4	750	145.67	1.03	R 77 RF77	8	32	102	42.87	2.8		
4.7	713	138.39	1.08		8	38	88	36.93	3.2		
5.3	625	121.42	1.23			40	83	34.73	3.4		
5.1	651	166.59	1.18	R 77 RF77	6	41	81	33.79	2.8		
5.8	569	145.67	1.35		6	45	74	31.12	2.8		
6.1	541	138.39	1.43			52	64	26.74	4.4		
7.1	467	195.24	1.65	R 77 RF77	4	60	56	23.28	5.1		
8.3	398	166.59	1.94		4	64	52	21.81	5.4		
9.5	348	145.67	2.2			15	217	90.77	0.87	R 37 RF37	4
10	331	138.39	2.3			16	202	84.61	0.93		
11	290	121.42	2.7			19	177	73.96	1.06		
13	246	102.99	3.1			20	166	69.33	1.13		
15	222	92.97	3.47			23	146	61.18	1.29		
5.4	618	158.14	0.91	R 67 RF67	6	25	133	55.76	1.41		
6.2	538	137.67	1.05		6	29	115	48.08	1.64		
6.6	504	128.97	1.12			31	107	44.81	1.76		
7.5	445	113.94	1.27			35	94	39.17	2.0		
7.0	477	199.81	1.18			38	88	36.72	2.1		
7.6	440	184.07	1.28	R 67 RF67	4	43	77	32.40	2.4		
8.8	378	158.14	1.49		4	48	69	28.73	2.7		
10	329	137.67	1.71			57	58	24.42	3.2		
11	308	128.97	1.83			59	68	28.32	2.8		
12	272	113.94	2.1			53	62	26.03	2.8		
13	253	105.83	2.2			62	53	22.27	3.5		
14	229	95.91	2.5			72	46	19.31	4.1		
16	206	86.11	2.7			77	43	18.05	4.4		
19	177	74.17	3.2			89	38	15.60	4.9		
20	167	69.75	3.4			105	32	13.25	5.5		
23	146	61.26	3.9			117	29	11.83	6.0		
24	136	56.89	4.1								

R系列斜齿轮硬齿面减速机



输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数		
r/min	Nm	i	f _B	Type	P	r/min	Nm	i	f _B	Type	P		
0.37KW						0.37KW							
23	146	61.30	0.83	R 27 RF27	4	253	13.7	5.50	2.7	RX 57 RXF57	4		
25	134	55.87	0.92			274	12.6	5.07	2.7				
29	115	48.17	1.06			320	10.8	4.35	5.9				
31	107	44.90	1.14			367	9.4	3.79	6.9				
35	94	39.25	1.30			392	8.8	3.55	7.3				
38	88	36.79	1.39			443	7.8	3.14	7.8	RX 37 RXF37	4		
43	78	32.47	1.57			478	7.2	2.91	8.7				
48	69	28.78	1.78			527	6.6	2.64	9.9				
57	58	24.47	2.1			586	5.9	2.37	11				
49	68	28.37	1.80			681	5.1	2.04	13				
53	62	26.09	1.96			724	4.8	1.92	14	RX 167R97 RF167R97	4		
62	53	22.32	2.3			842	4.1	1.65	16				
72	46	19.35	2.6			426	8	3.26	1.85				
77	43	18.08	2.8			456	8	3.05	1.97				
89	37	15.63	3.3			527	7	2.64	2.28				
105	32	13.28	3.9	621	6	2.24	2.69	RX 147R77 RF147R77	4				
						695	5			2.00	3.01		
						813	4			1.71	3.52		
						869	4			1.60	3.76		
						0.55KW							
						0.23	20411	6069	0.83	R 167R97 RF167R97	4		
						0.26	18157	5399	0.93				
						0.30	15837	4709	1.07				
						0.33	14065	4182	1.20				
						0.29	16193	4815	0.75	R 147R77 RF147R77	4		
						0.32	14545	4325	0.84				
						0.38	12339	3669	0.99				
						0.43	10856	3228	1.13				
						0.49	9528	2833	1.28				
						0.54	8593	2555	1.42				
						0.63	7436	2211	1.64				
						0.71	6561	1951	1.86				
						0.82	5734	1705	2.1				
						0.90	5166	1536	2.4				
						1.05	4470	1329	2.7				
						1.19	3921	1166	3.1				
						0.56	8354	2484	0.9	R 137R77 RF137R77	4		
						0.52	8939	2658	0.84				
						0.58	8112	2412	0.93				
						0.67	6972	2073	1.08				
						0.76	6185	1839	1.22				
						0.87	5374	1598	1.40				
						0.99	4698	1397	1.60				
						1.1	4123	1226	1.82				
						1.3	3666	1090	2.1				
						1.5	3198	951	2.4				
						1.7	2795	831	2.7				
						1.0	4675	1390	0.86	R 107R77 RF107R77	4		
						1.2	4016	1194	1.01				
						1.3	3508	1043	1.15				
						1.6	2986	888	1.35				
						1.8	2647	787	1.53				
						2.0	2327	692	1.74				
						2.3	2035	605	1.99				
						1.0	4671	1389	0.87				
						1.1	4090	1216	0.99				
						1.3	3683	1095	1.10				
						1.5	3118	927	1.30				
						1.7	2731	812	1.48				



R 系列斜齿轮硬齿面减速机

输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f _B	机 型 号 Type	极 数 P	输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f _B	机 型 号 Type	极 数 P
0.55KW						0.55KW					
1.5	3151	937	0.89			8.8	562	158.14	1.00		
1.7	2771	824	1.02			10	489	137.67	1.15		
1.9	2479	737	1.14			11	458	128.97	1.23		
2.2	2122	631	1.33			12	405	113.94	1.39		
2.5	1883	560	1.50	R 97R57	4	13	376	105.83	1.50	R 67	4
2.9	1628	484	1.73	RF97R57	4	14	341	95.91	1.66	RF67	4
3.2	1446	430	1.95			16	306	86.11	1.84		
3.7	1275	379	2.2			19	263	74.17	2.1		
4.1	1130	336	2.5			20	248	69.75	2.3		
4.7	995	296	2.8			23	218	61.26	2.6		
5.6	837	249	3.4			24	202	56.89	2.8		
2.6	1766	525	0.83			12	428	120.63	0.99		
3.1	1527	454	0.95			13	379	106.58	1.12		
3.5	1332	396	1.09			14	352	98.99	1.20		
4.0	1180	351	1.23	R 87R57	4	15	319	89.71	1.33		
4.6	1026	305	1.42	RF87R57	4	17	286	80.55	1.48		
2.9	1587	472	0.92			20	246	69.23	1.72		
3.5	1345	400	1.08			21	230	64.85	1.84		
3.9	1214	361	1.20			24	203	57.29	2.1	R 57	4
5.1	925	275	0.83			26	189	53.22	2.2	RF57	4
5.9	794	236	0.97	R 77R37	4	29	171	48.23	2.5		
6.3	743	221	1.04	RF77R37	4	32	154	43.30	2.8		
7.8	599	178	1.29			37	132	37.30	3.2		
2.6	1893	256.89	1.50	R 97	8	40	125	35.07	3.4		
2.8	1775	240.83	1.59	RF97	8	53	93	26.31	4.5		
3.1	1591	215.94	1.77			56	89	24.99	4.8		
2.9	1682	289.60	1.68			63	78	21.93	5.4		
3.3	1492	256.89	1.90	R 97	6	75	66	18.60	6.4		
3.5	1399	240.83	2.0	RF97	6	15	333	93.68	0.85		
3.9	1254	215.94	2.2			16	302	84.90	0.94		
4.8	1029	289.60	2.7			18	271	76.23	1.04		
5.4	912	256.89	3.1	R 97	4	20	243	68.54	1.16		
5.8	855	240.83	3.3	RF97	4	22	228	64.21	1.24		
6.4	767	215.94	3.7			25	202	56.73	1.40		
3.6	1375	246.54	1.06			26	187	52.69	1.51	R 47	4
4.1	1208	216.54	1.21	R 87	6	29	170	47.75	1.66	RF47	4
4.3	1148	205.71	1.27	RF87	6	32	152	42.87	1.85		
4.9	1014	181.77	1.44			38	131	36.93	2.1		
5.7	867	155.34	1.68			40	123	34.73	2.3		
5.6	876	246.54	1.66			47	106	29.88	2.7		
6.4	769	216.54	1.89	R 87	4	52	95	26.74	3.0		
6.8	731	205.71	2.0	RF87	4	60	83	23.28	3.4		
7.6	646	181.77	2.3			64	77	21.81	3.6		
8.9	552	155.34	2.6			23	217	61.18	0.87		
9.8	506	142.41	2.9			25	198	55.76	0.95		
11	444	124.97	3.3			29	171	48.08	1.10		
12	421	118.43	3.5			31	159	44.81	1.18		
13	368	103.65	4.0			35	139	39.17	1.35		
8.3	592	166.59	1.30			38	130	36.72	1.44		
9.5	517	145.67	1.49			43	115	32.40	1.63		
10	492	138.39	1.57			48	102	28.73	1.84	R 37	4
11	431	121.42	1.79			57	87	24.42	2.2	RF37	4
13	366	102.99	2.1			62	79	22.27	2.4		
15	330	92.97	2.3	R 77	4	72	69	19.31	2.7		
17	291	81.80	2.7	RF77	4	77	64	18.05	2.9		
18	274	77.24	2.8			89	55	15.60	3.4		
21	234	65.77	3.3			105	47	13.25	4.0		
						117	42	11.83	4.5		

R系列斜齿轮硬齿面减速机



输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数
r/min	Nm	i	f _B	Type	P	r/min	Nm	i	f _B	Type	P
0.55KW						0.55KW					
35	139	39.25	0.88	R 27 RF27	4	320	16	4.35	4.0	RX 57 RXF57	4
38	131	36.79	0.94			367	14	3.79	4.6		
43	115	32.47	1.06			392	13	3.55	4.9		
48	102	28.78	1.20			443	12	3.14	5.3		
57	87	24.47	1.41			478	11	2.91	5.8		
62	79	22.32	1.54			527	10	2.64	6.6		
72	69	19.35	1.78			586	9	2.37	7.4		
77	64	18.08	1.90			681	8	2.04	8.6		
89	56	15.63	2.2			724	7	1.92	9.1		
105	47	13.28	2.6			842	6	1.65	11		
117	42	11.86	2.9			939	5	1.48	12		
137	36	10.13	3.2			1069	5	1.30	12		
148	33	9.41	3.4			RX 37 RXF37	4	426	12		
170	29	8.16	3.8					456	11	3.05	1.33
182	27	7.63	3.9					527	10	2.64	1.53
211	23	6.59	4.3					621	8	2.24	1.81
248	20	5.60	4.7					695	7	2.00	2.03
278	18	5.00	5.0					813	6	1.71	2.37
326	15	4.27	5.4			0.75KW		869	6	1.60	2.53
348	14	4.00	5.6					0.30	21596	4709	0.8
412	12	3.37	6.2			0.33	19179	4182	0.88	R 167R97 RF167R97	4
77	64	18.06	1.25			0.52	12185	2657	1.39		
89	55	15.57	1.44	0.60	10699	2333	1.58				
96	52	14.52	1.55	0.67	9562	2085	1.77				
110	45	12.69	1.77	0.95	6677	1456	2.5				
117	42	11.89	1.89	R 17 RF17	4	0.43	14804	3228	0.83		
132	37	10.50	2.0			0.49	12992	2833	0.94		
149	33	9.31	2.2			0.54	11717	2555	1.04		
176	28	7.91	2.6			0.63	10140	2211	1.21		
161	31	8.63	2.2			0.71	8947	1951	1.37		
184	27	7.55	2.0			0.82	7819	1705	1.56		
197	25	7.04	2.1			0.90	7044	1536	1.73		
226	22	6.15	2.3			1.0	6095	1329	2.0		
241	20	5.76	2.4			1.2	5347	1166	2.3		
273	18	5.09	2.7			R 147R77 RF147R77	4	0.7	8544	1863	0.88
308	16	4.51	2.8	0.9	7273			1586	1.03		
363	14	3.83	3.1	1.0	6237			1360	1.21		
171	30	5.18	2.3	1.1	5632			1228	1.34		
195	26	4.53	2.9	0.67	9507			2073	0.79		
206	25	4.30	3.0	0.76	8434			1839	0.89		
235	22	3.77	3.7	0.87	7287			1589	1.03		
268	19	5.18	3.7	0.99	6407			1397	1.17		
307	17	4.53	4.6	1.1	5623			1226	1.34		
323	16	4.30	4.7	1.3	4999			1090	1.50		
369	14	3.77	5.9	1.5	4361	951	1.72				
434	12	3.20	7.9	1.7	3811	831	1.97				
481	11	2.89	9.3	1.9	3348	730	2.2				
547	9.4	2.54	12	R 137R77 RF137R77	4	1.3	4783	1043	0.85		
579	8.9	2.40	13			1.6	4072	888	0.99		
681	7.6	2.04	17			1.8	3609	787	1.12		
747	6.9	1.86	17			1.3	5022	1095	0.80		
863	6.0	1.61	18			1.5	4251	927	0.95		
203	25	4.35	2.5			1.7	3724	812	1.09		
234	22	3.79	2.9			3.9	1637	357	2.5		
249	21	3.55	3.1			4.4	1435	313	2.8		
282	18	3.14	3.3			R 107R77 RF107R77	4	2.2	2894	631	0.97
304	17	2.91	3.7					2.5	2568	560	1.10
RX 57 RXF57	6	2.9	2220	484	1.27						
		3.2	1972	430	1.43						
		3.7	1738	379	1.62						
		4.1	1541	336	1.83						
		4.7	1357	296	2.1						
		5.6	1142	249	2.5						
		RX 97R57 RF97R57	4	2.1	2.5						
				2.5	2.5						
2.5	2.5										
2.5	2.5										
2.5	2.5										
2.5	2.5										
2.5	2.5										
2.5	2.5										



R 系列斜齿轮硬齿面减速机

输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f _B	机 型 号 Type	极 数 P	输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f _B	机 型 号 Type	极 数 P
0.75KW						0.75KW					
3.5	1816	396	0.80	R 87R57 RF87R57	4	13	516	106.58	0.82	R 57 RF57	4
4.0	1610	351	0.91		4	14	479	98.99	0.88		4
4.6	1399	305	1.04			15	435	89.71	0.97		
5.2	1224	267	1.19			17	390	80.55	1.08		
5.9	1078	235	1.35			20	335	69.23	1.26		
3.9	1656	361	1.70			21	314	64.85	1.35		
4.6	1376	300	2.0			24	277	57.29	1.52		
5.4	1174	256	2.4			26	258	53.22	1.64		
2.8	2445	245.50	1.65	R 107	8	29	234	48.23	1.81		
3.0	2259	226.11	1.81	RF107	8	32	210	43.30	2.0		
3.4	1995	200.87	2.0			37	181	37.30	2.3		
3.1	2138	215.94	1.32	R 97	8	40	170	35.07	2.5	R 47 RF47	4
3.7	1841	185.97	1.53	RF97	8	46	146	30.18	2.9		
4.0	1674	169.06	1.68			52	131	26.97	3.2		
3.6	1901	256.89	1.49	R 97	6	53	130	26.31	3.3		
3.8	1782	240.83	1.58	RF97	6	56	124	24.99	3.4		
4.2	1598	215.94	1.76			63	108	21.93	3.9		
4.8	1403	289.60	2.0	R 97 RF97	4	75	92	18.60	4.6		
5.4	1244	256.89	2.3		4	20	332	68.54	0.85		
5.8	1167	240.83	2.4			22	311	64.21	0.91		
6.4	1046	215.94	2.7			25	275	56.73	1.03		
7.5	901	185.97	3.1			26	255	52.69	1.10		
8.2	819	169.06	3.4			29	231	47.75	1.22		
4.2	1602	216.54	0.91	R 87 RF87	6	32	208	42.87	1.36		
4.4	1522	205.71	0.96		6	38	179	36.93	1.58		
5.0	1345	181.77	1.08			40	168	34.73	1.68		
5.9	1149	155.34	1.27			47	145	29.88	1.95		
6.4	1054	142.41	1.38			52	129	26.70	2.2		
5.6	1194	246.54	1.22	R 87 RF87	4	59	114	23.59	2.5	R 37 RF37	4
6.4	1049	216.54	1.39		4	52	130	26.74	2.2		
6.8	996	205.71	1.46			60	113	23.28	2.5		
7.6	880	181.77	1.65			64	106	21.81	2.7		
8.9	752	155.34	1.94			72	93	19.27	3.0		
9.8	690	142.41	2.1			78	87	17.89	3.1		
11	605	124.97	2.4			86	79	16.22	3.3		
12	574	118.43	2.5			29	233	48.08	0.81		
13	502	103.65	2.9			31	217	44.81	0.87		
15	452	93.38	3.2			35	190	39.17	0.99		
8.3	807	166.59	0.96	R 77 RF77	4	38	178	36.72	1.06		
9.5	706	145.67	1.09		4	43	157	32.40	1.20		
10	670	138.39	1.15			48	139	28.73	1.35		
11	588	121.42	1.31			57	118	24.42	1.59		
13	499	102.99	1.55			62	110	22.27	1.71		
15	450	92.97	1.71			72	96	19.31	1.97		
17	396	81.80	1.95			77	89	18.05	2.1		
18	375	77.24	2.1			89	77	15.60	2.4		
21	319	65.77	2.4			105	66	13.25	2.7		
25	273	56.38	2.8			117	59	11.83	2.9		
27	247	50.90	3.1			137	50	10.11	3.2		
31	217	44.78	3.6			147	47	9.47	3.4		
33	205	42.29	3.8			48	139	28.78	0.88	R 27 RF27	4
11	625	128.97	0.90	R 67 RF67	4	57	119	24.47	1.03		
12	552	113.94	1.02		4	62	110	22.32	1.11		
13	513	105.83	1.10			72	96	19.35	1.28		
14	465	95.91	1.21			77	89	18.08	1.37		
16	417	86.11	1.35			89	77	15.63	1.58		
19	359	74.17	1.57			105	66	13.28	1.86		
20	338	69.75	1.67			117	59	11.86	2.1		
23	297	61.26	1.90			137	50	10.13	2.3		
24	276	56.89	2.0			148	47	9.41	2.5		
27	250	51.56	2.3			170	40	8.16	2.7		
30	224	46.29	2.5			182	38	7.63	2.8		
						211	33	6.59	3.1		
						248	28	5.60	3.4		
						278	25	5.00	3.6		

R系列斜齿轮硬齿面减速机



输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f _B	机 型 号 Type	极 数 P	输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f _B	机 型 号 Type	极 数 P
0.75KW						1.1KW					
77	89	18.06	0.89	R 17 RF17	4	0.53	17744	2657	0.95	R 167R97 RF167R97	4
89	77	15.57	1.04			0.60	15580	2333	1.09		
96	72	14.52	1.11			0.67	13924	2085	1.22		
110	63	12.69	1.27			0.75	12535	1877	1.35		
117	59	11.89	1.36			0.84	11153	1670	1.52		
132	52	10.50	1.47			0.96	9723	1456	1.74		
149	46	9.31	1.57			1.1	8655	1296	2.0	R 147R77 RF147R77	4
176	39	7.91	1.73			1.2	7593	1137	2.2		
184	37	7.55	1.41			0.63	14765	2211	0.83		
197	35	7.04	1.48			0.72	13029	1951	0.94		
226	30	6.15	1.67			0.82	11386	1705	1.07		
241	28	5.76	1.75			0.91	10258	1536	1.19		
273	25	5.09	1.90			1.1	8875	1329	1.38		
308	22	4.51	2.0			1.2	7787	1166	1.57		
363	19	3.83	2.2			1.4	6872	1029	1.78		
201	35	4.53	2.2	RX 67 RXF67	6	1.6	5937	889	2.1		
212	33	4.30	2.3			1.8	5236	784	2.3		
241	29	3.77	2.8			2.0	4641	695	2.6		
284	25	3.20	3.8			1.0	9082	1360	0.83	R 137R77 RF137R77	4
268	26	5.18	2.7	RX 67 RXF67	4	1.1	8201	1228	0.92		
307	23	4.53	3.4			1.3	7212	1080	1.04		
323	22	4.30	3.5			1.4	6812	1020	1.10		
369	19	3.77	4.3			1.6	5803	869	1.30		
434	16	3.20	5.8			1.0	9329	1397	0.81		
481	15	2.89	6.8			1.1	8187	1226	0.92		
547	13	2.54	8.6			1.3	7279	1090	1.03		
579	12	2.40	9.5			1.5	6351	951	1.18		
681	10	2.04	12			1.7	5550	831	1.36		
747	9	1.86	13			1.9	4875	730	1.54		
863	8	1.61	13			2.2	4201	629	1.79		
240	29	3.79	2.2	RX 57 RXF57	6	2.6	3666	549	2.1		
256	27	3.55	2.4			2.9	3272	490	2.3		
290	24	3.14	2.5			2	4621	692	0.87	R 107R77 RF107R77	4
313	22	2.91	2.8			2.3	3994	598	1.01		
345	20	2.64	3.2	RX 57 RXF57	4	2.6	3539	530	1.14		
320	22	4.35	2.9			2.9	3199	479	1.26		
367	19	3.79	3.4			3.4	2711	406	1.49		
392	18	3.55	3.6			3.9	2384	357	1.70		
443	16	3.14	3.9			4.5	2090	313	1.93		
478	15	2.91	4.3			5.1	1850	277	2.2	R 97R57 RF97R57	4
527	13	2.64	4.9			5.7	1636	245	2.5		
586	12	2.37	5.4			3.3	2872	430	0.98		
681	10	2.04	6.3			3.7	2531	379	1.11		
724	10	1.92	6.7			4.2	2244	336	1.26		
842	8	1.65	7.8			4.7	1977	296	1.43		
939	7	1.48	8.6	RX 37 RXF37	4	5.6	1663	249	1.70	R 87R57 RF87R57	4
1069	7	1.30	9.0			6.0	1563	234	1.80		
456	15	3.05	0.9			6.7	1396	209	2.0		
527	13	2.64	1.13			5.2	1783	267	0.82		
621	11	2.24	1.33			6.0	1569	235	0.93		
695	10	2.00	1.49			6.7	1389	208	1.05		
813	9	1.71	1.74			5.5	1710	256	0.85	R 107 RF107	8
869	8	1.60	1.86			6.1	1543	231	0.94		
						7.2	1302	195	1.12		
						2.8	3586	245.50	1.13		
						3.0	3283	226.11	1.23		
						3.4	2901	200.87	1.39		
						4.0	2461	167.29	1.64		



R 系列斜齿轮硬齿面减速机

输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f_B	机 型 号 Type	极 数 P	输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f_B	机 型 号 Type	极 数 P
1.1KW						1.1KW					
3.5	2788	256.89	1.02	R 97 RF97	6	20	488	69.23	0.87	R 57 RF57	4
3.8	2613	240.83	1.08		6	22	457	64.85	0.92		
4.2	2343	215.94	1.20		6	24	404	57.29	1.05		
4.9	2018	185.97	1.39		6	26	375	53.22	1.13		
5.4	1812	256.89	1.56	R 97 RF97	4	29	340	48.23	1.24		
5.8	1699	240.83	1.66			32	305	43.30	1.39		
6.5	1523	215.94	1.85			38	263	37.30	1.61		
7.5	1312	185.97	2.1			40	247	35.07	1.71		
8.3	1192	169.06	2.4			46	213	30.18	1.99		
9.3	1064	150.78	2.7			52	190	26.97	2.2		
11	894	126.75	3.2			53	186	26.31	2.3		
12	822	116.48	3.4			56	176	24.99	2.4		
6.5	1527	216.54	0.95	R 87 RF87	4	64	155	21.93	2.7		
6.8	1451	205.71	1.00			75	131	18.60	3.2		
7.7	1282	181.77	1.14			83	118	16.79	3.6		
9.0	1096	155.34	1.33			29	337	47.75	0.84	R 47 RF47	4
9.8	1004	142.41	1.45			33	302	42.87	0.93		
11	881	124.97	1.65			38	260	36.93	1.08		
12	835	118.43	1.74			40	245	34.73	1.15		
14	731	103.65	1.99			47	211	29.88	1.34		
15	659	93.38	2.2			52	188	26.70	1.50		
17	578	81.92	2.5			59	166	23.59	1.69		
19	510	72.37	2.9			60	164	23.28	1.72		
22	448	63.50	3.3			64	154	21.81	1.83		
23	424	60.18	3.4			73	136	19.27	2.0		
27	372	52.67	3.9			78	126	17.89	2.2		
12	856	121.42	0.90	R 77 RF77	4	86	114	16.22	2.3		
14	726	102.99	1.06			96	103	14.56	2.4		
15	656	92.97	1.18			112	88	12.54	2.7		
17	577	81.80	1.34			119	83	11.79	2.8		
18	545	77.24	1.41			138	72	10.15	3.0		
21	464	65.77	1.66			154	64	9.07	3.2		
25	398	56.38	1.94			43	229	32.40	0.82	R 37 RF37	4
28	359	50.90	2.1			49	203	28.73	0.93		
31	316	44.78	2.4			57	172	24.42	1.09		
33	298	42.29	2.6			73	139	19.31	1.35		
39	254	36.01	3.0			78	130	18.05	1.45		
43	231	32.72	3.3			90	112	15.60	1.67		
16	607	86.11	0.93	R 67 RF67	4	106	95	13.25	1.87		
19	523	74.17	1.08			118	85	11.83	2.0		
20	492	69.75	1.15			138	73	10.11	2.2		
23	432	61.26	1.31			148	68	9.47	2.3		
25	401	56.89	1.41			176	57	7.97	2.6		
27	364	51.56	1.55			210	48	6.67	2.8		
30	326	46.29	1.73			247	41	5.67	3.3		
35	281	39.88	1.9			277	36	5.06	3.5		
37	265	37.50	2.0			72	139	19.35	0.88	R 27 RF27	4
43	228	32.27	2.2			77	130	18.08	0.94		
49	203	28.83	2.4			90	113	15.63	1.09		
50	203	28.13	2.5			105	96	13.28	1.28		
52	192	26.72	2.6			118	85	11.86	1.42		
60	169	23.44	3.1			138	73	10.13	1.57		
70	143	19.89	3.9			172	59	8.16	1.86		
						183	55	7.63	1.92		
						212	47	6.59	2.1		
						250	40	5.60	2.3		
						280	36	5.00	2.5		
						328	31	4.27	2.7		
						350	29	4.00	2.8		
						415	24	3.37	3.1		

—141—



R 系列斜齿轮硬齿面减速机

输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f_B	机 型 号 Type	极 数 P	输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f_B	机 型 号 Type	极 数 P
1.5KW						1.5KW					
15	894	92.97	0.86			73	186	19.31	1.01		
17	787	81.80	0.98			78	174	18.05	1.08		
18	743	77.24	1.04			90	150	15.60	1.25		
21	633	65.77	1.22			106	127	13.25	1.40		
25	542	56.38	1.42			118	114	11.83	1.51		
28	490	50.90	1.57			138	97	10.11	1.64		
31	431	44.78	1.79	R 77	4	148	91	9.47	1.72	R 37	4
33	407	42.29	1.90	RF77	4	176	77	7.97	1.91	RF37	4
39	346	36.01	2.2			210	64	6.67	2.1		
43	315	32.72	2.4			247	55	5.67	2.4		
49	273	28.35	2.8			277	49	5.06	2.6		
57	237	24.67	3.1			324	42	4.32	2.9		
60	225	23.37	3.4			346	39	4.05	2.9		
65	206	21.43	3.7			411	33	3.41	3.2		
74	181	18.80	4.1								
23	589	61.26	0.96			90	150	15.63	0.81		
25	547	56.89	1.03			105	128	13.28	0.96		
27	496	51.56	1.14			118	114	11.86	1.06		
30	445	46.29	1.27			138	97	10.13	1.18		
35	384	39.88	1.47			172	78	8.16	1.39		
37	361	37.50	1.56	R 67	4	183	73	7.63	1.43	R 27	4
43	310	32.27	1.82	RF67	4	212	63	6.59	1.57	RF27	4
49	277	28.83	2.0			250	54	5.60	1.73		
50	276	28.13	2.0			280	48	5.00	1.86		
52	262	26.72	2.1			328	41	4.27	1.99		
60	230	23.44	2.4			350	38	4.00	2.1		
70	195	19.89	2.9			415	32	3.37	2.3		
78	176	17.95	3.2								
26	523	53.22	0.8			249	54	5.63	1.91		
29	474	48.23	0.9			262	51	5.35	1.88		
32	425	43.30	1.0			296	45	4.73	2.5		
38	366	37.30	1.15			347	39	4.04	3.5	RX 77	4
40	344	35.07	1.23			378	36	3.70	4.0	RXF77	4
46	296	30.18	1.43			431	31	3.25	5.5		
52	265	26.97	1.60	R 57	4	455	30	3.08	6.1		
53	258	26.31	1.64	RF57	4	519	26	2.70	7.8		
56	245	24.99	1.72			576	23	2.43	8.6		
64	215	21.93	1.96								
75	183	18.60	2.3			309	44	4.53	1.77		
83	165	16.79	2.6			326	41	4.30	1.82		
95	145	14.77	2.8			371	36	3.77	2.3		
100	137	13.95	2.9			438	31	3.20	3.1		
118	117	11.88	3.3			484	28	2.89	3.6		
38	355	36.93	0.8			551	24	2.54	4.5	RX 67	4
40	334	34.73	0.84			583	23	2.40	5.0	RXF67	4
47	287	29.88	0.98			686	20	2.04	6.4		
52	257	26.70	1.1			753	18	1.86	6.6		
59	227	23.59	1.2			870	15	1.61	6.9		
60	224	23.28	1.26			1000	13	1.40	7.3		
64	210	21.81	1.34								
73	185	19.27	1.50			369	36	3.79	1.78		
78	172	17.89	1.58			394	34	3.55	1.90		
86	156	16.22	1.66			446	30	3.14	2.0		
96	140	14.56	1.8			481	28	2.91	2.3		
112	121	12.54	1.9	R 47	4	530	25	2.64	2.6		
119	113	11.79	2.0	RF47	4	591	23	2.37	2.8	RX 57	4
138	98	10.15	2.2			686	20	2.04	3.3	RXF57	4
154	87	9.07	2.4			729	18	1.92	3.5		
175	77	8.01	2.5			848	16	1.65	4.1		
180	75	7.76	2.1			946	14	1.48	4.5		
201	67	6.96	2.2			1077	13	1.30	4.7		
233	58	6.00	2.5								
248	54	5.64	2.7								
289	47	4.85	3.0								
323	42	4.34	3.3								
366	37	3.83	3.7								

R系列斜齿轮硬齿面减速机



输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f _B	机 型 号 Type	极 数 P	输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f _B	机 型 号 Type	极 数 P
2.2KW						2.2KW					
0.85	21991	1670	0.8			5.8	3414	245.50	1.18		
0.98	19173	1456	0.88			6.3	3145	226.11	1.29		
1.1	17066	1296	1.0			7.1	2744	200.87	1.45		
1.2	14972	1137	1.1	R 167R97	4	8.5	2327	167.29	1.74		
1.4	13326	1012	1.27	RF167R97	4	9.1	2170	156.04	1.86	R 107	4
1.6	11483	872	1.47			10	1940	139.47	2.1	RF107	4
1.8	10140	770	1.67			11	1746	125.55	2.3		
2.1	8744	664	1.9			12	1581	113.70	2.6		
						14	1402	100.82	2.9		
						16	1286	91.16	3.2		
2.6	7111	540	1.72			6.6	3003	215.94	0.94		
3.1	6084	462	2.0	R 147R87	4	7.6	2586	185.97	1.09		
3.3	5689	432	2.1	RF147R87	4	8.4	2351	169.06	1.20		
3.8	4912	373	2.5			9.4	2097	150.78	1.34		
4.3	4346	330	2.8			11	1763	126.75	1.60		
1.2	15354	1166	0.80			12	1620	116.48	1.74		
1.4	13550	1029	0.90			14	1439	103.44	1.96	R 97	4
1.6	11707	889	1.04			15	1286	92.48	2.2	RF97	4
1.8	10324	784	1.18	R 147R77	4	17	1156	83.15	2.4		
2.0	9152	695	1.34	RF147R77	4	20	1004	72.17	2.8		
2.3	7993	607	1.53			22	906	65.12	3.1		
2.6	7203	547	1.70			24	832	59.84	3.4		
3.0	6321	480	1.93			27	739	53.14	3.8		
						30	661	47.51	4.3		
2.1	9108	684	0.83			11	1738	124.97	0.84		
2.4	7923	595	0.95			12	1647	118.43	0.88		
1.9	9721	730	0.77			14	1442	103.65	1.04		
2.3	8376	629	0.90			15	1299	93.38	1.12		
2.6	7311	549	1.03			17	1139	81.92	1.28		
2.9	6525	490	1.15	R 137R77	4	20	1007	72.37	1.45		
3.3	5699	428	1.32	RF137R77	4	22	883	63.50	1.65		
3.8	4980	374	1.51			24	837	60.18	1.74		
4.5	4221	317	1.78			27	733	52.67	1.99	R 87	4
5.0	3808	286	1.97			30	660	47.45	2.2	RF87	4
5.6	3377	250	2.2			34	579	41.63	2.5		
6.4	2958	219	2.5			39	511	36.73	2.9		
						44	453	32.57	3.2		
3.9	4822	357	0.84			41	478	34.34	3.0		
4.5	4228	313	0.96			45	434	31.22	3.4		
5.1	3741	277	1.08	R 107R77	4	51	387	27.81	3.8		
5.5	3458	256	1.17	RF107R77	4	61	325	23.40	4.5		
6.7	2809	208	1.44			66	299	21.51	4.7		
4.4	4336	321	0.93								
6.0	3125	234	0.90	R 97R57	4	22	915	65.77	0.8		
6.7	2791	209	1.01	RF97R57	4	25	784	56.38	1.0		
						28	708	50.90	1.1		
3.2	6212	223.34	1.21			32	623	44.78	1.2		
3.8	5234	188.16	1.43			34	588	42.29	1.31		
4.1	4851	174.4	1.55			39	501	36.01	1.54		
4.5	4348	156.31	1.73	R 137	8	43	455	32.72	1.69		
5.0	3925	141.12	1.92	RF137	8	50	394	28.35	1.95	R 77	4
5.5	3565	128.18	2.1			58	343	24.67	2.1	RF77	4
6.2	3163	113.72	2.4			61	325	23.37	2.4		
6.9	2871	103.2	2.6			66	298	21.43	2.6		
						76	261	18.80	2.8		
4.7	4220	200.87	0.96			80	248	17.82	3.0		
5.6	3515	167.29	1.15	R 107	6	91	217	15.60	3.2		
6.0	3278	156.04	1.23	RF107	6	101	195	14.05	3.5		
6.7	2930	139.47	1.38								



R 系列斜齿轮硬齿面减速机

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数		
r/min	Nm	i	f _B	Type	P	r/min	Nm	i	f _B	Type	P		
2.2KW						2.2KW							
36	555	39.88	0.98	R 67 RF67	4	300	69	4.73	1.69	RX 77 RXF77	4		
38	522	37.50	1.03			351	59	4.04	2.3				
44	449	32.27	1.13			384	54	3.70	2.7				
49	401	28.83	1.22			437	47	3.25	3.6				
61	326	23.44	1.61			461	45	3.08	4.1				
71	277	19.89	2.0			526	39	2.70	5.2				
79	250	17.95	2.2			584	35	2.43	5.7				
90	220	15.79	2.4			667	31	2.13	6.1				
95	207	14.91	2.5			755	27	1.8	6.4				
112	177	12.70	2.8			850	24	1.67	6.7				
123	160	11.54	2.9			1000	21	1.42	7.1				
142	139	10.00	3.2										
163	121	8.70	3.4										
182	108	7.79	3.3										
						377	55	3.77	1.50	RX 67 RXF67	4		
						444	46	3.20	2.0				
						491	42	2.89	2.4				
38	519	37.30	0.82	R 57 RF57	4	559	37	2.54	3.0				
40	488	35.07	0.87			592	35	2.40	3.3				
47	420	30.18	1.01			696	30	2.04	4.3				
53	375	26.97	1.13			763	27	1.86	4.4				
65	305	21.93	1.39			882	23	1.61	4.6				
76	259	18.60	1.64			1014	20	1.40	4.8				
85	234	16.79	1.81										
96	205	14.77	1.99			452	46	3.14	1.34	RX 57 RXF57	4		
102	194	13.95	2.1			538	38	2.64	1.69				
120	165	11.88	2.3			599	34	2.37	1.89				
132	150	10.79	2.4			696	30	2.04	2.2				
152	130	9.35	2.7			740	28	1.92	2.3				
157	126	9.06	2.8			861	24	1.65	2.7				
178	111	7.97	3.0			959	21	1.48	3.0				
						1092	19	1.30	3.1				
						3.0KW							
74	268	19.27	1.03	R 47 RF47	4	1.2	20417	1137	0.83			R 167R97 RF167R97	4
88	226	16.22	1.15			1.4	18172	1012	0.93				
98	203	14.56	1.23			1.6	15658	872	1.08				
113	174	12.54	1.35			1.8	13827	770	1.22				
120	164	11.79	1.40			2.1	11923	664	1.42				
140	141	10.15	1.53			2.8	9158	510	1.85				
157	126	9.07	1.64										
177	111	8.01	1.73			R 147R87 RF147R87	4	2.6	9697	540	1.26		
183	108	7.76	1.42					3.1	8296	462	1.47		
204	97	6.96	1.54					3.3	7757	432	1.58		
237	83	6.00	1.76					3.8	6698	373	1.82		
252	78	5.64	1.86					4.3	5926	330	2.1		
293	67	4.85	2.1					5.0	5082	283	2.4		
327	60	4.34	2.3										
371	53	3.83	2.5										
91	217	15.60	0.87	R 37 RF37	4			1.6	15963	889	0.8	R 147R77 RF147R77	4
107	184	13.25	0.97			1.8	14078	784	0.87				
120	165	11.83	1.05			2.0	12480	695	0.98				
140	141	10.11	1.14			2.3	10900	607	1.12				
150	132	9.47	1.19			2.6	9822	547	1.24				
178	111	7.97	1.32										
213	93	6.67	1.46			R 137R77 RF137R77	4	2.9	8898	490	0.85		
250	79	5.67	1.69					3.3	7772	428	0.97		
281	70	5.06	1.80					3.8	6791	374	1.11		
329	60	4.32	2.0					4.5	5756	317	1.31		
351	56	4.05	2.0					5.0	5193	286	1.45		
416	47	3.41	2.2					5.7	4540	250	1.66		
								6.5	3977	219	1.89		
								2.7	9388	517	0.80		
								3.1	8226	453	0.91		
140	141	10.13	0.81	R 27 RF27	4	5.8	4647	245	0.87	R 107R77 RF107R77	4		
215	92	6.59	1.09			6.8	3945	208	1.02				
254	78	5.60	1.19			7.8	3433	181	1.18				
284	70	5.00	1.28			5.6	4798	253	0.84				
333	59	4.27	1.38										
355	56	4.00	1.44										
421	47	3.37	1.58										

R系列斜齿轮硬齿面减速机



输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f _B	机 型 号 Type	极 数 P	输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f _B	机 型 号 Type	极 数 P
3.0KW						3.0KW					
3.2	8472	223.34	0.89	R 137 RF137	8	32	849	44.78	0.91	R 77 RF77	4
3.8	7137	188.16	1.05		8	34	802	42.29	0.96		4
4.1	6615	174.40	1.14			39	683	36.01	1.13		
4.5	5929	156.31	1.27			43	621	32.72	1.24		
5.0	5353	141.12	1.40			50	538	28.35	1.43		
5.5	4862	128.18	1.55			58	468	24.67	1.57		
6.2	4314	113.72	1.74			61	443	23.37	1.74		
6.9	3914	103.20	1.92			66	406	21.43	1.90		
8.0	3364	88.70	2.20			76	357	18.80	2.1		
						80	338	17.82	2.2		
4.3	6245	222.60	1.20	R 137 RF137	6	91	296	15.60	2.4		
5.1	5287	188.45	1.42		6	101	266	14.05	2.5		
5.5	4892	174.40	1.54			115	234	12.33	2.8		
6.1	4385	156.31	1.71			131	206	10.88	3.0		
6.8	3959	141.12	1.90			147	183	9.64	3.2		
7.5	3596	128.18	2.10			169	160	8.42	3.7		
8.4	3190	113.72	2.40			187	144	7.59	4.0		
9.3	2895	103.20	2.60			213	126	6.66	4.3		
6.2	4377	156.04	0.92	R 107 RF107	6	61	445	23.44	1.18	R 67 RF67	4
6.9	3913	139.47	1.03		6	71	377	19.89	1.50		4
7.6	3522	125.55	1.15			79	340	17.95	1.63		
6.3	4288	226.11	0.94	R 107 RF107	4	90	299	15.79	1.76		
7.1	3810	200.87	1.06		4	95	283	14.91	1.8		
8.5	3172	167.29	1.27			112	241	12.70	2.0		
9.1	2959	156.04	1.37			123	219	11.54	2.1		
10	2645	139.47	1.53			142	190	10.00	2.3		
11	2381	125.55	1.70			53	511	26.97	0.8	R 57 RF57	4
12	2156	113.70	1.87			65	416	21.93	1.02		4
14	1912	100.82	2.1			76	353	18.60	1.20		
16	1729	91.16	2.3			85	318	16.79	1.33		
18	1465	77.26	2.8			96	280	14.77	1.46		
20	1366	72.00	3.0			102	265	13.95	1.53		
9.4	2860	150.78	0.99	R 97 RF97	4	120	225	11.88	1.69		
11	2404	126.75	1.17		4	132	205	10.79	1.79		
12	2209	116.48	1.28			152	177	9.35	2.0		
14	1962	103.44	1.44			157	172	9.06	2.1		
15	1754	92.48	1.61			178	151	7.97	2.3		
17	1577	83.15	1.79			189	143	7.53	2.6		
20	1369	72.17	2.1			222	122	6.41	2.7		
22	1235	65.12	2.3			244	110	5.82	3.0		
24	1135	59.84	2.5			281	96	5.05	3.2		
27	1008	53.14	2.8			323	83	4.39			
30	901	47.51	3.1			88	308	16.22	0.84	R 47 RF47	4
33	810	42.72	3.5			98	276	14.56	0.90		4
38	703	37.08	4.0			113	238	12.54	0.99		
43	630	33.20	4.3			120	224	11.79	1.03		
15	1771	93.38	0.82	R 87 RF87	4	140	192	10.15	1.12		
17	1554	81.92	0.94		4	157	172	9.07	1.20		
20	1373	72.37	1.06			177	152	8.01	1.27		
22	1204	63.50	1.21			183	147	7.76	1.04		
24	1141	60.18	1.28			204	132	6.96	1.13		
27	999	52.67	1.46			237	114	6.00	1.29		
30	900	47.45	1.62			252	107	5.64	1.36		
34	790	41.63	1.85			293	92	4.85	1.53		
39	697	36.73	2.1			327	82	4.34	1.67		
44	618	32.57	2.4			371	73	3.83	1.86		
51	527	27.81	2.8			140	192	10.11	0.83	R 37 RF37	4
41	651	34.34	2.2			150	180	9.47	0.87		4
45	592	31.22	2.5			178	151	7.97	0.97		
51	528	27.84	2.8			213	126	6.67	1.07		
61	444	23.40	3.3			250	108	5.67	1.24		
66	408	21.51	3.5			281	96	5.06	1.32		
74	362	19.10	3.6			329	82	4.32	1.45		
83	324	17.08	4.0			351	77	4.05	1.49		
93	291	15.35	4.3			416	65	3.41	1.63		



R 系列斜齿轮硬齿面减速机

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数		
r/min	Nm	i	f _B	Type	P	r/min	Nm	i	f _B	Type	P		
3.0KW						4.0KW							
254	106	5.60	0.88	R 27 RF27	4	3.9	8830	374	0.85	R 137R77 RF137R77	4		
284	95	5.00	0.94			4.5	7484	317	1.00				
333	81	4.27	1.01			5.0	6752	286	1.11				
355	76	4.00	1.05			5.8	5902	250	1.27				
421	64	3.37	1.2			6.6	5171	219	1.45				
109	258	6.47	4.31	RX 127 RXF127	8	3.8	877	376	0.85				
						4.2	8004	339	0.94				
						4.8	7012	297	1.07				
220	127	6.44	1.42	RX 87 RXF87	4	8.0	4273	181	0.95	R 107R77 RF107R77	4		
256	110	5.55	1.92			7.5	4509	191	0.90				
281	100	5.05	2.3			8.6	3943	167	1.03				
316	89	4.50	3.1										
376	75	3.78	3.8			4.4	8152	163.46	1.50	R 147 RF147	8		
300	94	4.73	1.24	RX 77 RXF77	4	4.9	7324	146.85	1.67				
						6.0	5946	119.24	2.0				
						6.5	5487	110.03	2.2				
						4.1	8698	174.40	0.86	R 137 RF137	8		
						4.6	7796	156.31	0.96				
5.1	7038	141.12	1.07										
5.6	6393	128.18	1.18										
6.3	5671	113.72	1.33										
7.0	5147	103.20	1.46										
377	75	3.77	1.10	RX 67 RXF67	4	4.3	8354	223.34	0.90	R 137 RF137	6		
						5.1	7038	188.16	1.07				
						5.5	6523	174.40	1.15				
						6.1	5847	156.31	1.29				
						6.8	5278	141.12	1.42				
						7.5	4794	128.18	1.57				
						8.4	4254	113.72	1.77				
						9.3	3860	103.2	1.95				
1014	28	1.40	3.5	11	3318	88.70	2.3						
452	62	3.14	0.98	RX 57 RXF57	4	9	4172	167.29	0.97	R 107 RF107	4		
						9	3891	156.04	1.04				
						10	3478	139.47	1.16				
						11	3131	125.55	1.29				
						13	2835	113.70	1.43				
						14	2514	100.82	1.61				
						16	2273	91.16	1.78				
						19	1927	77.26	2.1				
538	52	2.64	1.24	R 167R87 RF167R87	4	20	1795	72.00	2.3				
						22	1616	64.81	2.5				
						25	1464	58.69	2.8				
						28	1298	52.05	3.1				
						12	2905	116.48	0.97			R 97 RF97	4
						14	2579	103.44	1.09				
						16	2306	92.48	1.22				
						17	2073	83.15	1.36				
20	1800	72.17	1.57										
22	1624	65.12	1.74										
24	1492	59.84	1.89										
27	1325	53.14	2.1										
592	47	2.40	2.4	R 147R87 RF147R87	4	30	1185	47.51	2.4				
						34	1065	42.72	2.6				
						39	925	37.08	3.0				
						43	828	33.20	3.3				
						45	803	32.22	3.0				
						54	669	26.84	3.6				
						58	624	25.03	4.3				
						64	558	22.37	4.6				
696	40	2.04	1.61	R 147R77 RF147R77	4	71	502	20.14	4.9				
						78	455	18.24	6.2				
						2.4	14331	607	0.85			R 147R77 RF147R77	4
						2.6	12915	547	0.95				
						3.0	11333	480	1.08				
						3.5	9609	407	1.27				

R系列斜齿轮硬齿面减速机



输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数						
r/min	Nm	i	f _B	Type	P	r/min	Nm	i	f _B	Type	P						
4.0KW						4.0KW											
23	1583	63.5	0.92	R 87 RF87	4	142	253	10.15	0.85	R 47 RF47	4						
24	1501	60.18	0.97			159	226	9.07	0.91								
27	1313	52.67	1.11			180	200	8.04	0.96								
30	1183	47.45	1.23			207	174	6.96	0.86								
35	1038	41.63	1.40			240	150	6.00	0.98								
39	916	36.73	1.59			255	141	5.64	1.04								
44	812	32.57	1.79			297	121	4.85	1.17								
52	693	27.81	2.1			332	108	4.34	1.27								
42	856	34.34	1.70			376	96	3.83	1.42	RX 127 RXF127	8						
46	779	31.22	1.87			109	344	6.47	3.23								
52	694	27.84	2.1			121	310	5.88	3.59	RX 127 RXF127	6						
62	584	23.40	2.5			147	254	6.47	4.37								
67	536	21.51	2.7			259 285 320 381	144 131 117 98	5.55 5.05 4.50 3.78	1.46 1.78 2.3 2.9	RX 87 RXF87	4						
75	476	19.10	3.1														
84	426	17.08	3.1														
94	383	15.35	3.3														
108	332	13.33	3.6			356 389 443 468 533 593 676 766 862 1014	105 96 84 80 70 63 55 49 43 37	4.04 3.70 3.25 3.08 2.70 2.43 2.13 1.88 1.67 1.42	1.28 1.50 2.0 2.3 2.9 3.2 3.4 3.6 3.7 3.9	RX 77 RXF77	4						
121	297	11.93	3.9														
40	898	36.01	0.86	R 77 RF77	4												
44	816	32.72	0.94														
51	707	28.35	1.09														
58	615	24.67	1.19														
62	583	23.37	1.32														
67	534	21.43	1.44														
77	469	18.80	1.56														
81	444	17.82	1.65														
92	389	15.60	1.79														
102	350	14.05	1.93														
117	307	12.33	2.1														
132	271	10.88	2.3														
149	240	9.64	2.5														
171	210	8.42	2.8														
190	189	7.59	3.0														
216	166	6.66	3.3														
245	147	5.88	3.5														
276	130	5.21	3.7														
72	496	19.89	1.14	R 67 RF67	4	450 498 567 600 706 774 894 1029	83 75 66 62 53 48 42 36	3.20 2.89 2.54 2.40 2.04 1.86 1.61 1.40	1.31 1.33 1.68 1.85 2.4 2.4 2.6 2.7	RX 67 RXF67	4						
80	448	17.95	1.24														
91	394	15.79	1.34														
97	372	14.91	1.39														
113	317	12.70	1.54														
125	288	11.54	1.63														
144	249	10.00	1.77														
166	217	8.70	1.91														
185	194	7.79	1.84														
196	184	7.36	1.90														
230	156	6.27	2.0														
253	142	5.70	2.1														
292	123	4.93	2.2														
336	107	4.29	2.4														
77	464	18.60	0.91	R 57 RF57	4	545 608 706 750 873 973 1108	69 62 53 50 43 38 34	2.64 2.37 2.04 1.92 1.65 1.48 1.30	0.95 1.05 1.22 1.30 1.51 1.66 1.75	RX 57 RXF57	4						
86	419	16.79	1.01														
97	368	14.77	1.11														
103	348	13.95	1.16														
121	296	11.88	1.29														
133	269	10.79	1.36														
154	233	9.35	1.49														
159	226	9.06	1.56														
181	199	7.97	1.68														
191	188	7.53	1.75														
225	160	6.41	1.97														
247	145	5.82	2.1														
285	126	5.05	2.3														
328	109	4.39	2.4														
						5.5KW											
						2.2	21556	664	0.80	R 167R97 RF167R97	4						
						2.5	18764	578	0.90								
						2.8	16556	510	1.02								
						3.3	14219	438	1.19								
						3.8	12336	380	1.37								
						4.3	10973	338	1.54								
						4.7	9966	307	1.70								
						5.1	9155	282	1.85								
						3.1	14998	462	0.81	R 147R87 RF147R87	4						
						3.3	14024	432	0.87								
						3.9	12109	373	1.01								
						4.4	10713	330	1.14								
						5.1	9187	283	1.33								
						5.8	8116	250	1.51								
						6.7	7012	216	1.74								
						7.5	6201	191	1.97								



R 系列斜齿轮硬齿面减速机

输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f _B	机 型 号 Type	极 数 P	输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f _B	机 型 号 Type	极 数 P
5.5KW						5.5KW					
3.7	12752	196.41	1.32	R 167 RF167	8	45	1105	32.22	2.2	R 97 RF97	4
4.5	10440	160.80	1.63			54	920	26.84	2.6		
5.5	8469	130.44	1.99			58	858	25.03	3.1		
6.0	7855	120.99	2.17			64	767	22.37	3.3		
6.9	6779	104.41	2.50			71	691	20.14	3.6		
						79	625	18.24	3.8		
						89	554	16.17	4.1		
4.4	10613	163.46	1.15	R 147 RF147	8	30	1627	47.45	0.90	R 87 RF87	4
4.9	9534	146.85	1.28			35	1427	41.63	1.02		
6.0	7742	119.24	1.57			39	1259	36.73	1.16		
6.6	7144	110.03	1.72			44	1117	32.57	1.30		
5.9	7960	163.46	1.54	R 147 RF147	6	52	954	27.81	1.53		
6.5	7151	146.85	1.71			52	955	27.84	1.53		
8	6133	119.24	2.0			62	802	23.40	1.82		
8.8	5659	110.03	2.2			67	738	21.51	2.0		
10	4865	94.60	2.5			75	655	19.10	2.1		
12	4293	83.47	2.8			84	586	17.08	2.2		
5.6	8790	128.18	0.86	R 137 RF137	8	94	526	15.35	2.4		
6.3	7798	113.72	0.96			108	457	13.33	2.6		
7.0	7077	103.2	1.06			121	409	11.93	2.8		
8.1	6083	88.70	1.24			145	339	9.90	3.3		
5.5	8970	174.40	0.84	R 137 RF137	6	156	317	9.25	3.6		
6.1	8039	156.31	0.94			173	285	8.32	3.8		
6.8	7258	141.12	1.04			199	248	7.22	4.1		
7.5	6592	128.18	1.14			77	645	18.80	1.14	R 77 RF77	4
8.4	5849	113.72	1.29			81	611	17.82	1.20		
9.3	5308	103.20	1.42			92	535	15.60	1.30		
6.4	7658	223.34	0.98	R 137 RF137	4	102	482	14.05	1.40		
7.7	6451	188.16	1.17			117	423	12.33	1.53		
8.3	5980	174.40	1.26			132	373	10.88	1.66		
9.2	5359	156.31	1.40			149	331	9.64	1.79		
10	4839	141.12	1.55			171	289	8.42	2.1		
11	4395	128.18	1.71			190	260	7.59	2.2		
13	3899	113.72	1.93			216	228	6.66	2.4		
14	3538	103.20	2.1			245	202	5.88	2.52		
16	3041	88.70	2.5			276	179	5.21	2.68		
18	2774	80.91	2.7			91	541	15.79	0.97	R 67 RF67	4
20	2520	73.49	3.0			97	511	14.91	1.01		
22	2236	65.20	3.4			113	435	12.70	1.12		
24	2029	59.17	3.7			125	396	11.54	1.19		
28	1744	50.86	4.3			144	343	10.00	1.29		
11	4305	125.55	0.94	R 107 RF107	4	166	298	8.70	1.39		
13	3898	113.70	1.04			185	267	7.79	1.34		
14	3457	100.82	1.17			196	252	7.36	1.38		
16	3126	91.16	1.29			230	215	6.27	1.44		
19	2649	77.26	1.54			253	195	5.70	1.49		
20	2469	72.00	1.64			292	169	4.93	1.61		
22	2222	64.84	1.82			336	147	4.29	1.73		
25	2012	58.69	2.01			97	506	14.77	0.81	R 57 RF57	4
28	1785	52.05	2.3			103	478	13.95	0.85		
31	1614	47.06	2.5			121	407	11.88	0.93		
36	1367	39.88	3.0			133	370	10.79	0.99		
17	2851	83.15	0.99	R 97 RF97	4	154	321	9.35	1.08		
20	2475	72.17	1.14			181	273	7.97	1.22		
22	2233	65.12	1.26			191	258	7.53	1.27		
24	2052	59.84	1.37			225	220	6.41	1.43		
27	1822	53.14	1.55			247	200	5.82	1.51		
30	1629	47.51	1.73			285	173	5.05	1.66		
34	1465	42.72	1.93			328	151	4.39	1.75		
39	1271	37.08	2.2			297	166	4.85	0.85	R 47 RF47	4
43	1138	33.20	2.4			332	149	4.34	0.92		
52	944	27.54	2.7			376	131	3.83	1.03		

R系列斜齿轮硬齿面减速机



输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数
r/min	Nm	i	f _B	Type	P	r/min	Nm	i	f _B	Type	P
5.5KW						7.5KW					
116	443	6.22	3.79	RX 157 RXF157	8 8	4.4	14408	330	0.85	R 147R87 RF147R87	4 4
123	420	5.88	2.64	RX 127 RXF127	8 8	5.2	12356	283	0.99		
147	350	6.47	3.18	RX 127 RXF127	6 6	5.8	10915	250	1.12		
164	315	5.88	3.53			6.8	9431	216	1.30		
182	283	5.28	3.92			7.6	8339	191	1.47		
217	238	6.65	1.82	RX 107 RXF107	4 4	9.1	7030	161	1.74		
257	200	5.60	2.14			3.7	18366	196.41	0.92	R 167 RF167	8 8
277	186	5.19	3.52			4.5	15036	160.80	1.13		
310	166	4.65	3.93			5.5	12197	130.44	1.39		
				6.0	11314	120.99	1.50				
247	208	5.82	1.9	RX 97 RXF97	4 4	6.9	9763	104.41	1.73		
297	173	4.85	2.1			4.9	13775	196.41	1.23	R 167 RF167	6 6
319	162	4.52	3.5			6.0	11277	160.80	1.50		
356	144	4.04	3.9			7.4	9145	130.44	1.84		
396	130	3.64	4.3			7.9	8485	120.99	1.99		
436	118	3.30	4.7			9.2	7323	104.41	2.31		
493	104	2.92	5.4			10	6462	92.14	2.6		
545	94	2.64	5.9			12	5602	79.88	3.0		
643	80	2.24	7.0			14	4984	71.07	3.4		
735	70	1.96	7.6			15	4487	63.98	3.8		
878	59	1.64	8.1			16	4103	58.51	4.1		
1014	51	1.42	8.4			4.4	15285	163.46	0.80		
320	161	4.50	1.7	4.9	13732	146.85	0.89				
381	135	3.78	2.1	6.0	11150	119.24	1.09				
414	124	3.48	3.1	6.6	10289	110.03	1.20				
466	110	3.09	3.4	RX 87 RXF87	4 4	5.9	11464	163.46	1.07	R 147 RF147	6 6
522	99	2.76	3.9			6.5	10299	146.85	1.19		
581	89	2.48	4.3			8.0	8363	119.24	1.45		
670	77	2.15	4.7			8.8	7717	110.03	1.59		
						10	6635	94.60	1.84		
						12	5854	83.47	2.1		
443	161	3.25	1.47	RX 77 RXF77	4 4	7.7	8677	188.16	0.87	R 137 RF137	4 4
468	110	3.08	1.65			8.4	8042	174.40	0.94		
533	97	2.70	2.1			9.3	7208	156.31	1.04		
593	87	2.43	2.3			10	6508	141.12	1.16		
676	76	2.13	2.5			11	5911	128.18	1.27		
766	67	1.88	2.6			13	5244	113.72	1.43		
862	60	1.67	2.7			14	4759	103.20	1.58		
1014	51	1.42	2.9			16	4090	88.70	1.84		
567	91	2.54	1.22	18	3731	80.91	2.0	R 107 RF107	4 4		
600	86	2.40	1.35	20	3389	73.49	2.2				
706	73	2.04	1.73	22	3007	65.20	2.5				
774	66	1.86	1.78	25	2729	59.17	2.8				
894	58	1.61	1.86	29	2345	50.86	3.2				
1029	50	1.40	2.0	16	4204	91.16	0.96				
706	73	2.04	0.89	19	3563	77.26	1.13				
750	69	1.92	0.95	20	3320	72.00	1.22				
873	59	1.65	1.10	23	2989	64.81	1.35	R 167R97 RF167R97	4 4		
973	53	1.48	1.21	25	2706	58.69	1.49				
1108	46	1.30	1.27	28	2400	52.05	1.68				
7.5KW						31	2170			47.06	1.86
2.9	22268	510	0.8	37	1839	39.88	2.2				
3.3	19124	438	0.88	42	1607	34.84	2.5				
3.8	16591	380	1.02	50	1344	29.14	3.0				
4.3	14758	338	1.15	48	1404	30.44	2.9				
4.8	13404	307	1.26	54	1257	27.25	3.2				
5.2	12313	282	1.37	59	1134	24.60	3.6				
				65	1030	22.34	3.9				



R 系列斜齿轮硬齿面减速机

输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f _B	机 型 号 Type	极 数 P	输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f _B	机 型 号 Type	极 数 P
7.5KW						7.5KW					
24	2760	59.84	1.02	R 97 RF97	4	123	572	5.88	2.94	RX 127	6
27	2451	53.14	1.15			136	515	5.28	3.26	RXF127	6
31	2191	47.51	1.29			167	420	4.29	4.0		
34	1970	42.72	1.43			221	318	6.47	3.49	RX 127	4
39	1710	37.08	1.65			245	286	5.88	3.88	RXF127	4
44	1531	33.20	1.77			220	320	6.65	1.35	RX 107 RXF107	4
53	1270	27.54	1.98			260	269	5.60	1.59		
45	1486	32.22	1.72			281	250	5.19	2.6		
54	1238	26.84	1.94			314	224	4.65	2.9		
58	1154	25.03	2.30			348	202	4.20	3.9		
65	1032	22.37	2.48	R 87 RF87	4	251	280	5.82	1.41	RX 97 RXF97	4
72	929	20.14	2.64			301	233	4.85	1.59		
80	841	18.24	2.79			323	217	4.52	2.6		
40	1694	36.73	0.86			361	194	4.04	2.9		
45	1502	32.57	0.97			401	175	3.64	3.2		
52	1282	27.81	1.1			442	159	3.30	3.5		
52	1284	27.84	1.13			500	140	2.92	4.0		
62	1079	23.40	1.35			324	216	4.50	1.26	RX 87 RXF87	4
68	992	21.51	1.42			386	182	3.78	1.58		
76	881	19.10	1.54			420	167	3.48	2.3		
85	788	17.08	1.66			472	149	3.09	2.6		
95	708	15.35	1.78			529	133	2.76	2.9		
110	615	13.33	1.96			589	119	2.48	3.2		
122	550	11.93	2.1			679	103	2.15	3.5		
147	457	9.90	2.4			756	93	1.93	3.6		
158	427	9.25	2.7			913	77	1.60	3.8		
175	384	8.32	2.8			1050	67	1.39	4.1		
202	333	7.22	3.0	R 77 RF77	4	449	156	3.28	1.09	RX 77 RXF77	4
226	298	6.47	3.2			474	148	3.08	1.23		
272	247	5.36	3.5			541	130	2.70	1.56		
78	867	18.80	0.85			601	117	2.43	1.73		
82	822	17.82	0.89			685	102	2.13	1.84		
94	719	15.60	0.97			777	90	1.88	1.94		
104	648	14.05	1.04			874	80	1.67	2.0		
118	569	12.33	1.14			1028	68	1.42	2.1		
134	502	10.88	1.24			575	122	2.54	0.91	RX 67 RXF67	4
151	445	9.64	1.33			608	115	2.40	1.00		
173	388	8.42	1.53			716	88	2.04	1.28		
192	350	7.59	1.64			785	89	1.86	1.32		
219	307	6.66	1.78			907	77	1.61	1.38		
248	271	5.88	1.87	R 67 RF67	4	1043	67	1.40	1.45		
280	240	5.21	2.00			11KW					
115	586	12.70	0.83			4.9	18891	295	0.90	R 167R107 RF167R107	4
127	532	11.54	0.88			5.2	17994	281	0.94		
146	461	10.00	0.96			6.1	15241	238	1.11		
168	401	8.70	1.03			7.0	13320	208	1.27		
187	359	7.79	0.99			8.3	11271	176	1.50		
198	339	7.36	1.02			5.1	18379	287	0.92		
233	289	6.27	1.07	R 57 RF57	4	4.3	21645	338	0.80	R 167R97 RF167R97	4
256	263	5.70	1.11			4.8	19659	307	0.86		
296	227	4.93	1.20			5.2	18059	282	0.94		
340	198	4.29	1.28			5.8	16009	250	0.80	R 147R87 RF147R87	4
183	368	7.97	0.91			6.8	13832	216	0.88		
194	347	7.53	0.95	RX 127 RXF127	8	7.6	12231	191	1.00		
228	296	6.41	1.07			9.1	10310	161	1.19		
251	268	5.82	1.12			9.2	10182	159	1.20		
289	233	5.05	1.23								
333	202	4.39	1.30								
123	572	5.88	1.94	RX 157 RXF157	6						
156	449	6.22	3.74								

R系列斜齿轮硬齿面减速机



输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f _B	机 型 号 Type	极 数 P	输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f _B	机 型 号 Type	极 数 P
11KW						11KW					
6.0	16540	160.80	1.02	R 167 RF167	6	135	732	10.83	2.7	R 97 RF97	4
7.4	13417	130.44	1.26		6	158	626	9.26	3.0		4
7.9	12445	120.99	1.36		6	174	566	8.37	3.4		4
9.2	10740	104.41	1.58		6	206	480	7.09	3.9		4
						235	419	6.20	4.2		4
7.4	13284	196.41	1.27	R 167 RF167	4	68	1455	21.51	0.97	R 87 RF87	4
9.1	10876	160.80	1.56		4	76	1292	19.10	1.05		4
11.2	8822	130.44	1.91		4	85	1155	17.08	1.13		4
12	8183	120.99	2.07		4	95	1038	15.35	1.21		4
14	7062	104.41	2.4		4	110	902	13.33	1.33		4
16	6232	92.14	2.7		4	122	807	11.93	1.43		4
18	5403	79.88	3.1		4	147	670	9.90	1.66		4
21	4807	71.07	3.5		4	158	626	9.25	1.82		4
6.5	15105	146.85	0.81	R 147 RF147	6	175	563	8.32	1.94		4
8.1	12265	119.24	1.0		6	202	488	7.22	2.1		4
8.7	11318	110.03	1.08		6	226	438	6.47	2.2		4
10	9731	94.60	1.26		6	272	363	5.36	2.4		4
12	8586	83.47	1.42		6						4
8.9	11056	163.46	1.11	R 147 RF147	4	134	736	10.88	0.84	R 77 RF77	4
10	9932	146.85	1.23		4	151	652	9.64	0.91		4
12	8065	119.24	1.52		4	192	513	7.59	1.12		4
13	7442	110.03	1.64		4	219	450	6.66	1.21		4
15	6398	94.60	1.91		4	248	398	5.88	1.28		4
17	5645	83.47	2.2		4	280	352	5.21	1.36		4
20	4876	72.09	2.5		4	191	539	5.05	3.12	RX 157 RXF157	6
22	4508	66.65	2.7		4	209	492	4.68	3.41		6
24	4129	61.50	3.0		4	240	429	4.04	3.92		6
28	3576	52.87	3.4		4						6
10	9545	141.12	0.8	R 137 RF137	4	235	437	6.22	3.84	RX 157 RXF157	4
11	8669	128.18	0.87		4						4
13	7691	113.72	0.98		4	249	414	5.88	2.68		4
14	6980	103.2	1.08		4	277	372	5.28	2.98	RX 127 RXF127	4
16	5999	88.70	1.25		4	339	304	4.29	3.65		4
18	5472	80.91	1.37		4	372	277	3.95	4.01		4
20	4970	73.49	1.51		4					RX 107 RXF107	4
22	4410	65.20	1.71		4	281	366	5.19	1.79		4
25	4002	59.17	1.88		4	314	328	4.65	1.99		4
29	3440	50.86	2.2		4	348	296	4.20	2.63		4
33	3002	44.39	2.5		4	383	269	3.81	2.90		4
39	2540	37.65	3.0		4	432	238	3.38	3.27		4
44	2226	32.91	3.4		4	476	216	3.07	3.60		4
						553	186	2.64	4.19		4
23	4383	64.81	0.92	R 107 RF107	4	323	319	4.52	1.75	RX 97 RXF97	4
25	3969	58.69	1.02		4	361	285	4.04	1.96		4
28	3520	52.05	1.15		4	401	257	3.64	2.2		4
31	3183	47.06	1.27		4	442	233	3.30	2.4		4
37	2697	39.88	1.50		4	500	206	2.92	2.7		4
42	2356	34.84	1.72		4	553	186	2.64	3.0		4
50	1971	29.14	2.1		4	652	158	2.24	3.5		4
48	2059	30.44	1.96		4	745	138	1.96	3.9		4
54	1843	27.25	2.2		4	890	116	1.64	4.1		4
59	1664	24.60	2.4		4	1028	100	1.42	4.3		4
65	1511	22.34	2.7		4						4
74	1341	19.82	3.0		4	420	245	3.48	1.55	RX 87 RXF87	4
81	1217	17.99	3.3		4	472	218	3.09	1.75		4
						529	195	2.76	1.96		4
34	2889	42.72	0.98	R 97 RF97	4	589	175	2.48	2.2		4
39	2508	37.08	1.12		4	679	152	2.15	2.4		4
44	2245	33.20	1.21		4	756	136	1.93	2.5		4
53	1863	27.54	1.35		4	913	113	1.60	2.6		4
58	1693	25.03	1.57		4	1050	98	1.39	2.8		4
65	1513	22.37	1.69		4						4
72	1362	20.14	1.80		4	601	171	2.43	1.18	RX 77 RXF77	4
80	1234	18.24	1.90		4	685	150	2.13	1.25		4
90	1094	16.17	2.1		4	777	133	1.88	1.33		4
100	989	14.62	2.2		4	874	118	1.67	1.38		4
118	838	12.39	2.5		4	1028	100	1.42	1.46		4



R 系列斜齿轮硬齿面减速机

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数							
r/min	Nm	i	f _B	Type	P	r/min	Nm	i	f _B	Type	P							
15KW						15KW												
6.1	20783	238	0.81	R 167R107 RF167R107	4	53	2540	27.54	1.1	R 97 RF97	4							
7.0	18163	208	0.93			58	2309	25.03	1.15									
8.3	15369	176	1.10			65	2063	22.37	1.24									
6.5	19560	224	0.87			72	1858	20.14	1.32									
7.5	17028	195	0.99			80	1682	18.24	1.40									
7.4	18201	130.44	0.93	R 167 RF167	6	90	1491	16.17	1.51									
	8.0	16883	120.99			1.00	100	1348	14.62					1.6				
	9.2	14569	104.41			1.16	118	1143	12.39					1.8				
	11	12857	92.14			1.32	135	999	10.83					2.0				
							158	854	9.26					2.4				
7.4	18115	196.41	0.93	R 167 RF167	4	174	772	8.37	2.5	R 87 RF87	4							
	9.1	14830	160.80			1.14	206	654	7.09			2.9						
	11	12030	130.44			1.41	235	572	6.20			3.1						
	12	11159	120.99			1.52	85	1575	17.08			1.13						
	14	9630	104.41			1.76		95	1416			15.35			0.89			
	16	8498	92.14			1.99		110	1229			13.33			0.98			
	18	7367	79.88			2.3		122	1100			11.93			1.05			
	21	6555	71.07			2.6		147	913			9.90			1.21			
	23	5901	63.98			2.9		158	853			9.25			1.33			
	25	5396	58.51			3.1		175	767			8.32			1.42			
8.8	15353	110.03	0.80	R 147 RF147	6	202		666	7.22	1.51	RX 157 RXF157	4						
	10	13200	94.60			0.93		226	597	6.47					1.61			
	12	11647	83.47			1.05		272	494	5.36					1.73			
	13	10059	72.09			1.21	287	488	5.05	3.44			RX 127 RXF127	4				
	14	9300	66.65			1.31		315	446	4.68					3.77			
8.9	15076	163.46	0.81	R 147 RF147	4	361		388	4.04	3.32	RX 107 RXF107	4						
	9.9	13544	146.85			0.90		372	378	3.95					2.94	RX 97 RXF97	4	
	12	10997	119.24			1.11			281	479					5.19			1.36
	13	10148	110.03			1.20	314			429			4.65	1.52				
	15	8725	94.60			1.40	348			387			4.20	2.0				
	17	7698	83.47			1.59	383			351			3.81	2.2				
	20	6649	72.09			1.84	432			325			3.38	2.4				
	22	6147	66.65			1.99	476			295			3.07	2.6				
	24	5631	61.50			2.2	553			254			2.64	3.1				
	28	4876	52.87			2.5	635			221			2.30	3.5				
31	4303	46.65	2.8	749	188	1.95	3.8											
14	9518	103.2	0.8	R 137 RF137	4	854	164	1.71		4.0	RX 87 RXF87	4						
	16	8181	88.70			0.92	1014	138	1.44	4.4								
	18	7462	80.91			1.01	323	435	4.52	1.3								
	20	6778	73.49			1.11		361	388	4.04					1.4			
	22	6013	65.20			1.25		401	350	3.64					1.6			
	25	5457	59.17			1.38		442	317	3.30					1.8			
	29	4691	50.86			1.60		500	280	2.92					2.0			
	33	4094	44.39			1.84		553	254	2.64					2.2			
	39	3472	37.65			2.2		652	215	2.24					2.6			
	44	3035	32.91			2.5		745	188	1.96					2.8			
52	2567	27.83	2.9	890	158	1.64		3.0										
31	4340	47.06	0.9	R 107 RF107	4	1028		137	1.42	3.1								
	37	3678	39.88			1.10	420	335	3.48	1.14			RX 87 RXF87	4				
	42	3213	34.84			1.26		472	297	3.09					1.28			
	50	2688	29.14			1.50		529	265	2.76					1.43			
	48	2807	30.44			1.44		589	238	2.48					1.60			
	54	2513	27.25			1.61		679	207	2.15					1.75			
	59	2269	24.60			1.78		756	186	1.93					1.80			
	65	2060	22.34			1.96		913	154	1.60					1.92			
	74	1828	19.82			2.2		1050	134	1.39					2.0			
	81	1659	17.99			2.4												
94	1426	15.46	2.8															
108	1245	13.50	3.2															

R系列斜齿轮硬齿面减速机



输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数				
r/min	Nm	i	f _B	Type	P	r/min	Nm	i	f _B	Type	P				
18.5KW						18.5KW									
9.1	18291	160.80	0.93	R 167 RF167	4	110	1516	13.33	0.8	R 87 RF87	4				
11	14838	130.44	1.13			122	1357	11.93	0.85						
12	13763	120.99	1.24			147	1126	9.90	0.98						
14	11877	104.41	1.42			158	1052	9.25	1.08						
16	10481	92.14	1.61			175	946	8.32	1.15						
18	9086	79.88	1.86			202	821	7.22	1.22						
21	8084	71.07	2.1			226	736	6.47	1.30						
23	7278	63.98	2.3			272	610	5.36	1.40						
25	6655	58.51	2.5												
29	5791	50.91	2.9												
						317	547	4.68	3.07	RX 157	4				
						364	476	4.04	3.53	RXF157	4				
						412	420	3.57	4.0						
						348	478	4.20	1.63	RX 107 RXF107	4				
12	13564	119.24	0.90	383	452	3.81	1.73								
13	12516	110.03	0.98	432	401	3.38	1.95								
15	10761	94.06	1.14	476	364	3.07	2.1								
17	9495	83.47	1.29	553	313	2.64	2.5								
20	8200	72.09	1.49	635	273	2.30	2.9								
22	7581	66.65	1.61	749	231	1.95	3.1								
24	6944	61.50	1.76	854	203	1.71	3.3								
28	6014	52.87	2.0	1014	171	1.44	3.6								
31	5306	46.65	2.3												
36	4583	40.29	2.7												
						401	432	3.64	1.30	RX 97 RXF97	4				
18	9203	80.91	0.82	442	391	3.30	1.43								
20	8359	73.49	0.90	500	346	2.92	1.62								
22	7416	65.20	1.01	553	313	2.64	1.79								
25	6731	59.17	1.12	652	266	2.24	2.1								
29	5785	50.86	1.30	745	232	1.96	2.3								
33	5049	44.39	1.49	890	194	1.64	2.4								
39	4283	37.65	1.76	1028	168	1.42	2.5								
44	3744	32.91	2.0												
52	3166	27.83	2.3												
49	3362	29.56	2.2	529	327	2.76	1.16	RX 87 RXF87	4						
61	2730	24.00	2.7	589	294	2.48	1.29								
66	2520	22.15	3.0	679	255	2.15	1.42								
77	2166	19.04	3.5	756	229	1.93	1.46								
87	1911	16.80	3.9	913	190	1.60	1.56								
				1050	165	1.39	1.65								
						22KW									
37	4536	39.88	0.89	R 107 RF107	4	11	17645			130.44	0.95	R 167 RF167	4		
42	3963	34.84	1.02			12	16366			120.99	1.04				
50	3315	29.14	1.22			14	14124			104.41	1.20				
59	2798	24.60	1.44			16	12464	92.14	1.36						
65	2541	22.34	1.59			18	10805	79.88	1.57						
74	2255	19.82	1.79			21	9614	71.07	1.76						
81	2046	17.99	1.98			23	8655	63.98	2.0						
94	1759	15.46	2.3			25	7915	58.51	2.1						
108	1536	13.50	2.6			29	6887	50.91	2.5						
128	1302	11.45	3.1			32	6078	44.93	2.8						
146	1139	10.01	3.5			37	5269	38.95	3.2						
181	918	8.07	3.0												
213	778	6.84	3.6												
						13	14884	110.03	0.83	R 147 RF147	4				
72	2291	20.14	1.07			15	12797	94.60	0.95						
80	2075	18.24	1.13			17	11291	83.47	1.08						
90	1839	16.17	1.23	20	9752	72.09	1.3								
100	1663	14.62	1.30	22	9016	66.65	1.36								
118	1409	12.39	1.46	24	8258	61.50	1.48								
135	1232	10.83	1.59	28	7152	52.87	1.71								
158	1053	9.26	1.81	31	6310	46.65	1.94								
174	952	8.37	2.0	36	5450	40.29	2.2								
206	806	7.09	2.3	41	4821	35.64	2.5								
235	705	6.20	2.5	49	4051	29.95	3.0								
282	589	5.18	2.8												
325	511	4.49	3.0												



R 系列斜齿轮硬齿面减速机

输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f _B	机 型 号 Type	极 数 P	输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f _B	机 型 号 Type	极 数 P
22KW						22KW					
22	8820	65.20	0.85			652	316	2.24	1.77		
25	8004	59.17	0.94			745	276	1.96	1.94	RX 97	4
29	6880	50.86	1.09			890	231	1.64	2.05	RXF97	4
33	6005	44.39	1.25			1028	200	1.42	2.14		
39	5093	37.65	1.48			529	389	2.76	0.98		
44	4452	32.91	1.69			589	350	2.48	1.09		
52	3765	27.83	2.00	R 137	4	679	303	2.15	1.19	RX 87	4
49	3999	29.56	1.88	RF137	4	759	272	1.93	1.23	RXF87	4
61	3246	24.00	2.3			913	226	1.60	1.31		
66	2996	22.15	2.5			1050	196	1.39	1.39		
77	2576	19.04	2.9			30KW					
87	2273	16.80	3.3			16	16996	92.14	1.0		
101	1963	14.51	3.8			18	14735	79.88	1.15		
114	1736	12.83	4.3			21	13109	71.07	1.29		
						23	11802	63.98	1.43		
42	4713	34.84	0.86			25	10793	58.51	1.57		
50	3942	29.14	1.03			29	9391	50.91	1.80	R 167	4
59	3328	24.60	1.21			32	8288	44.93	2.04	RF167	4
65	3022	22.34	1.34			37	7185	38.95	2.4		
74	2681	19.82	1.51			42	6393	34.66	2.6		
81	2434	17.99	1.66			49	5510	29.87	3.1		
94	2091	15.46	1.93	R 107	4	60	4477	24.27	3.8		
108	1826	13.50	2.2	RF107	4	71	3796	20.58	4.5		
128	1549	11.45	2.6			17	15397	83.47	0.8		
146	1354	10.01	3.0			20	13298	72.09	0.92		
173	1144	8.46	3.5			22	12294	66.65	0.99		
181	1092	8.07	2.6			24	11261	61.50	1.09		
213	925	6.84	3.0			28	9752	52.87	1.25		
244	809	5.98	3.5			31	8605	46.65	1.42		
						36	7432	40.29	1.64	R 147	4
72	2724	20.14	1.04			41	6574	35.64	1.86	RF147	4
80	2467	18.24	1.14			49	5525	29.95	2.2		
90	2187	16.17	1.29			60	4462	24.19	2.5		
100	1978	14.62	1.43			71	3770	20.44	3.0		
118	1676	12.39	1.23			81	3328	18.04	3.0		
135	1465	10.83	1.34	R 97	4	93	2885	15.64	4.2		
158	1253	9.26	1.52	RF97	4	29	9382	50.86	0.80		
174	1132	8.37	1.69			33	8188	44.39	0.92		
206	959	7.09	1.96			39	6945	37.65	1.08		
235	839	6.20	2.1			44	6071	32.91	1.24		
282	701	5.18	2.4			52	5133	27.83	1.41		
325	607	4.49	2.5			61	4427	24.00	1.69		
						66	4086	22.15	1.85	R 137	4
147	1339	9.90	0.83			77	3512	19.04	2.1	RF137	4
158	1251	9.25	0.91			87	3099	16.80	2.4		
175	1125	8.32	0.97	R 87	4	101	2676	14.51	2.8		
202	977	7.22	1.03	RF87	4	114	2367	12.83	3.2		
226	875	6.47	1.10			135	1990	10.79	3.8		
272	725	5.36	1.18			192	1400	7.59	3.4		
						229	1177	6.38	4.1		
412	500	3.57	3.36	RX 157	4	74	3656	19.82	1.11		
				RXF157	4	81	3318	17.99	1.22		
348	592	4.20	1.32			94	2852	15.46	1.42		
383	537	3.81	1.45			108	2490	13.50	1.62		
432	477	3.38	1.64			128	2112	11.45	1.91		
476	433	3.07	1.80			146	1846	10.01	2.2	R 107	4
553	372	2.64	2.10	RX 107	4	173	1561	8.46	2.6	RF107	4
635	324	2.30	2.41	RXF107	4	181	1489	8.07	1.88		
749	275	1.95	2.61			213	1262	6.84	2.2		
854	241	1.71	2.75			244	1103	5.98	2.5		
1014	203	1.44	2.99			289	933	5.06	2.9		
401	513	3.64	1.09								
442	465	3.30	1.20	RX 97	4						
500	412	2.92	1.36	RXF97	4						
553	372	2.64	1.50								

R系列斜齿轮硬齿面减速机



输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数		
r/min	Nm	i	f _B	Type	P	r/min	Nm	i	f _B	Type	P		
30KW						37KW							
100	2697	14.62	0.80	R 97 RF97	4	39	8507	37.65	0.88	R 137 RF137	4		
118	2285	12.39	0.90			45	7436	32.91	1.01				
135	1998	10.83	0.98			53	6288	27.83	1.20				
158	1708	9.26	1.12			61	5423	24.00	1.38				
174	1544	8.37	1.24			67	5005	22.15	1.51				
206	1308	7.09	1.44			77	4302	19.04	1.75				
235	1144	6.20	1.55			88	3796	16.80	1.98				
282	955	5.18	1.75			101	3279	14.51	2.3				
325	828	4.49	1.85			115	2899	12.83	2.6				
						136	2438	10.79	3.1				
432	649	3.40	1.71	RX 127 RXF127	4 4	169	1968	8.71	3.7				
						194	1715	7.59	2.8				
						230	1442	6.38	3.3				
						285	1164	5.15	3.7				
432	623	3.38	1.25	RX 107 RXF107	4 4	74	4478	19.82	0.90	R 107 RF107	4 4		
476	566	3.07	1.38			82	4065	17.99	0.99				
553	487	2.64	1.60			95	3493	15.46	1.16				
635	424	2.30	1.84			109	3050	13.50	1.33				
749	360	1.95	2.0			128	2587	11.45	1.56				
854	315	1.71	2.1			147	2262	10.01	1.79				
1014	266	1.44	2.3	174	1912	8.46	2.1						
						182	1823	8.07	1.5				
500	539	2.92	1.04	RX 97 RXF97	4 4	215	1546	6.84	1.8				
553	487	2.64	1.15			246	1351	5.98	2.1				
652	413	2.24	1.35			291	1143	5.06	2.4				
745	362	1.96	1.48										
890	303	1.64	1.57										
1028	262	1.42	1.63										
37KW						432	801	3.40	1.39	RX 127	4		
18	18049	79.88	0.94	R 167 RF167	4 4	490	707	3.00	1.57	RXF127	4		
21	16058	71.07	1.05			568	610	2.59	1.82				
23	14456	63.98	1.17										
25	13220	58.51	1.28			435	796	3.38	0.98	RX 107 RXF107	4 4		
29	11503	50.91	1.47			479	723	3.07	1.08				
33	10152	44.93	1.67			557	622	2.64	1.25				
38	8801	38.95	1.92			639	542	2.30	1.44				
42	7831	34.66	2.16			754	459	1.95	1.57				
49	6749	29.87	2.5			860	403	1.71	1.65				
61	5484	24.27	3.1			1021	339	1.44	1.79				
78	4232	18.73	4.0			45KW							
90	3685	16.31	4.6			23	17463	63.98	0.97	R 167 RF167	4 4		
101	3290	14.56	5.1			25	15970	58.51	1.06				
						29	13896	50.91	1.22				
						33	12264	44.93	1.38				
						38	10631	38.95	1.59				
						43	9460	34.66	1.79				
						50	8153	29.87	2.08				
						61	6624	24.27	2.6				
						72	5617	20.58	3.0				
						79	5112	18.73	2.4				
						91	4452	16.31	3.4				
						102	3974	14.56	3.5				
22	15060	66.65	0.81	R 147 RF147	4 4	28	14431	52.87	0.85			R 147 RF147	4 4
24	13794	61.50	0.89			32	12733	46.65	0.96				
28	11946	52.87	1.02			37	10997	40.29	1.11				
32	10541	46.65	1.16			42	9728	35.64	1.26				
36	9104	40.29	1.34			49	8175	29.95	1.49				
41	8053	35.64	1.52			61	6603	24.19	1.69				
49	6767	29.95	1.81			72	5579	20.44	2.0				
61	5466	24.19	2.0			82	4924	18.04	2.0				
72	4618	20.44	2.4			95	4269	15.64	2.9				
81	4076	18.04	2.4			106	3797	13.91	3.2				
94	3534	15.64	3.5			123	3273	11.99	3.7				
106	3143	13.91	3.8			204	1979	7.25	4.1				



R 系列斜齿轮硬齿面减速机

输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数	输出转速	输出扭矩	传动比	使用系数	机 型 号	极 数		
r/min	Nm	i	f _B	Type	P	r/min	Nm	i	f _B	Type	P		
45KW						55KW							
45	8983	32.91	0.84	R 137 RF137	4	78	6352	19.04	1.18	R 137 RF137	4		
53	7596	27.83	0.99			88	5605	16.80	1.34				
62	6551	24.00	1.15			102	4841	14.51	1.55				
67	6046	22.15	1.24			115	4280	12.83	1.76				
78	5197	19.04	1.45			137	3600	10.79	2.1				
88	4586	16.80	1.64			170	2906	8.71	2.5				
102	3960	14.51	1.90			195	2532	7.59	1.90				
115	3502	12.83	2.1			232	2128	6.38	2.3				
137	2945	10.79	2.6			287	1718	5.15	2.5				
170	2377	8.71	3.1										
195	2072	7.59	2.3			415	1242	3.57	1.35	RX 157	4		
232	1741	6.38	2.8			479	1075	3.09	1.56	RXF157	4		
287	1406	5.15	3.1										
						75KW							
96	4220	15.46	0.96	R 107 RF107	4	38	17719	38.95	0.95	R 167 RF167	4		
110	3685	13.50	1.10			43	15767	34.66	1.07				
129	3125	11.45	1.29			50	13588	29.87	1.25				
148	2732	10.01	1.48			61	11041	24.27	1.53				
175	2309	8.46	1.75			72	9362	20.58	1.81				
183	2203	8.07	1.27			79	8521	18.73	1.43				
216	1867	6.84	1.50			91	7420	16.31	2.03				
247	1632	5.98	1.71			102	6624	14.56	2.13				
292	1381	5.06	2.0			119	5646	12.41	3.0				
						144	4677	10.28	3.4				
435	968	3.40	1.15	RX 127 RXF127	4	169	3990	8.77	4.0				
493	854	3.00	1.30										
571	737	2.59	1.51			49	13625	29.95	0.90	R 147 RF147	4		
646	652	2.29	1.70			61	11004	24.19	1.11				
767	549	1.93	2.02			72	9298	20.44	1.21				
						82	8207	18.04	1.20				
438	962	3.38	0.81	RX 107 RXF107	4	95	7115	15.64	1.72				
482	874	3.07	0.89			106	6328	13.91	1.87				
561	751	2.64	1.04			123	5454	11.99	2.2				
643	654	2.30	1.19			152	4431	9.74	2.8				
759	555	1.95	1.30			179	3758	8.26	3.3				
865	487	1.71	1.36			204	3298	7.25	2.5				
1028	410	1.44	1.48			251	2679	5.89	3.0				
						296	2275	5.00	3.6				
55KW						479	1466	3.09	1.15	RX 157 RXF157	4		
29	16984	50.91	1.00	538	1304	2.75	1.29						
33	14989	44.93	1.13	624	1124	2.37	1.49						
38	12984	38.95	1.30	767	915	1.93	1.84						
43	11563	34.66	1.46	R 167 RF167	4								
50	9963	29.87	1.70			767	915	1.93	1.21	RX 127	4		
61	8097	24.27	2.09			949	740	1.56	1.50	RXF127	4		
72	6866	20.58	2.50										
79	6248	18.73	1.96										
91	5441	16.31	2.76										
102	4857	14.56	2.90										
119	4140	12.41	4.09										
144	3429	10.28	4.66										
						90KW							
32	15563	46.65	0.8			R 147 RF147	4	43	18921	34.66	0.89	R 167 RF167	4
37	13441	40.29	0.91					50	16306	29.87	1.04		
42	11890	35.64	1.03					61	13249	24.27	1.28		
49	9991	29.95	1.22	72	11235			20.58	1.51				
61	8070	24.19	1.39	79	10225			18.73	1.20				
72	6819	20.44	1.65	91	8904			16.31	1.69				
82	6018	18.04	1.64	102	7948			14.56	1.77				
95	5218	15.64	2.3	119	6775			12.41	2.5				
106	4640	13.91	2.6	144	5612			10.28	2.8				
123	4000	11.99	3.1	169	4788			8.77	3.3				
152	3249	9.74	3.8										
204	2419	7.25	3.4										
251	1965	5.89	4.1										

R 系列斜齿轮硬齿面减速机



输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f_B	机 型 号 Type	极 数 P	输出转速 r/min	输出扭矩 Nm	传动比 i	使用系数 f_B	机 型 号 Type	极 数 P
90KW											
72	11158	20.44	1.01								
82	9848	18.04	1.00								
95	8538	15.64	1.43								
106	7593	13.91	1.56								
123	6545	11.99	1.87	R 147	4						
156	5170	9.47	2.4	RF147	4						
179	4509	8.26	2.7								
204	3958	7.25	2.1								
251	3215	5.89	2.5								
296	2729	5.00	3.0								
542	1555	2.75	1.08	R 157	4						
629	1340	2.37	1.25	RF157	4						
772	1091	1.93	1.54								
955	882	1.56	1.26	RX 127	4						
				RXF127	4						
110KW											
61	16193	24.27	1.04								
72	13731	20.58	1.23								
91	10882	16.31	1.38								
102	9715	14.56	1.45	R 167	4						
119	8280	12.41	2.04	RF167	4						
144	6859	10.28	2.3								
169	5851	8.77	2.7								
629	1638	2.37	1.03	RX 157	4						
772	1334	1.93	1.26	RXF157	4						
914	1126	1.63	1.49								
132KW											
72	16477	20.58	1.03								
91	13059	16.31	1.15								
102	11657	14.56	1.21	R 167	4						
119	9936	12.41	1.70	RF167	4						
144	8231	10.28	1.94								
169	7022	8.77	2.28								
914	1351	1.63	1.24	RX 157	4						
				RXF157	4						
160KW											
120	11963	12.41	1.41	R 167	4						
145	9910	10.28	1.61	RF167	4						
170	8454	8.77	1.89								



R 系列斜齿轮硬齿面减速机

M2max Nm	输出转速 1/min	传动比 i	机 型 号 Type	功 率 kW/4p	M2max Nm	输出转速 1/min	传动比 i	机 型 号 Type	功 率 kW/4p	
130	8.5	164	R 27R17 RF27R17	0.18	1550	1.0	1395	R 87R57 RF87R57	0.25	
	8.9	156				1.1	1232			
	10	135				1.2	1145			
	12	118				1.3	1037			
	13	104		1.7		802	0.37			
	15	90		1.8		754				
200	4.8	289	R 37R17 RF37R17	0.18		0.80	1737		0.18	
	5.7	243				0.91	1524			0.25
	6.2	226				1.1	1303			
	7.5	185				1.4	1008			0.37
	8.5	164				1.6	883			
	8.9	156				2.0	683			0.75
	10	135		2.3		599	1.1			
	11	127		3.5		396		1.1		
	13	104		4.0		351	0.75			
	15	90		4.6		305		0.55		
300	3.2	429	R 47R37 RF47R37	0.18		5.2	267		0.55	
	3.7	372				2.6	538	0.75		
	4.0	348				2.9	472			1.1
	4.6	301				3.5	400	0.18		
	6.5	255				3.9	361			0.18
	6.1	228				4.7	300	0.25		
450	2.1	678	R 57R37 RF57R37	0.18		5.5	256		0.18	
	2.4	589				0.35	4004	0.18		
	2.6	537			0.40	3481	0.18			
	3.0	471			0.32	4309		0.25		
	3.9	357			0.38	3702	0.37			
	4.4	319			0.46	3019		0.25		
	5.2	267			0.52	2668	0.37			
	5.8	241			0.62	2245		0.55		
600	1.9	730	R 67R37 RF67R37	0.18	0.69	2016	0.37			
	2.4	571			0.80	1733		0.55		
	2.9	486			0.86	1623			0.75	
	1.7	836			0.97	1434		0.37		
	1.9	750			1.2	1207			0.25	
	2.2	630			1.3	1084		0.37		
	2.5	561			1.5	934			0.55	
	2.8	495			1.6	878		0.75		
	3.2	438			2	755			0.37	
	3.6	388			0.76	1823		0.55		
	4.1	336			0.88	1583			0.75	
	4.8	287			1.00	1396		1.1		
820	1.2	1124	R 77R37 RF77R37	0.18	1.1	1228	R 97R57 RF97R57		0.25	
	1.3	1047			1.3	1068		0.37		
	1.5	915			1.5	937				0.55
	1.6	858			1.7	824		0.75		
	1.8	757			1.9	737			1.1	
	2.1	671			2.2	631		1.5		
	2.4	571			2.5	560			2.2	
	2.5	547			2.9	484		2.2		
	2.9	477			3.2	430			1.1	
	3.3	426			3.7	379		1.5		
	3.8	364			4.1	336			2.2	
	4.5	312			4.7	296		2.2		
	4.5	310			5.6	249			2.2	
	5.6	248			5.9	234		2.2		
1550	0.71	1955	R 87R57 RF87R57	0.18	2.2	625	2.2			
	0.65	2129			2.5	549				
	0.72	1930			5.1	270				
	0.80	1733			6.1	227				
	0.93	1489								

R系列斜齿轮硬齿面减速机



M2max Nm	输出转速 1/min	传动比 i	机 型 号 Type	功 率 kW/4p	M2max Nm	输出转速 1/min	传动比 i	机 型 号 Type	功 率 kW/4p
4300	0.21	6690	R 107R77 RF107R77	0.18	8000	0.41	3377	R 137R77 RF137R77	0.55
	0.24	5735				0.48	2926		
	0.27	5127		0.18		0.30	4709		0.37
	0.32	4302				0.35	4018		
	0.36	3847		0.25		0.40	3514		0.55
	0.46	3015				0.42	3338		
	0.36	3870		0.18		0.47	2929		
	0.42	3302		0.25		0.56	2484		
	0.46	2997				0.62	2242		0.75
	0.53	2621		0.37		0.75	1863		
	0.62	2252				0.88	1586		1.1
	0.68	2041		0.55		1.0	1360		
	0.83	1673				1.1	1228		1.5
	0.91	1531		0.75		1.3	1080		
	1.00	1390				1.4	1020		2.2
	1.2	1194		1.1		1.6	869		
	1.3	1043				2.1	684		0.55
	1.6	888		1.5		2.3	609		
	1.7	787				0.52	2658		0.75
	2.0	692		0.37		0.58	2412		1.1
	2.3	605				0.67	2073		1.5
	2.7	510		0.55		0.76	1839		2.2
	0.71	1971				0.88	1598		
	0.77	1813		0.75		1.0	1397		3
	0.88	1587		1.1		1.1	1226		
	1.00	1389				1.3	1090		4
	1.14	1216		1.5		1.5	951		
	1.27	1095				1.7	831		5.5
	1.50	927		2.2		2.0	730		
	1.71	812				2.3	629		3
	2.3	598		3		2.6	549		
	2.6	530		4		2.9	490		4
	2.9	479				3.4	428		
	3.5	406		2.2		3.8	374		5.5
	4.0	357				4.5	317		
	4.6	313		3		5.0	286		3
	5.2	277		4		5.8	250		
	5.8	245				2.6	564		4
	6.9	208		1.5		2.8	517		
	7.9	181		2.2		3.2	453		5.5
8000	3.1	463	R 137R77 RF137R77		13000	3.8	376	R 147R77 RF147R77	0.18
	3.4	420		3		4.2	339		
	3.8	373		4		4.8	297		0.25
	4.5	321				0.08	18210		
	5.1	281		0.18		0.09	15923		
	5.7	253				0.10	14075		0.37
	6.6	217		0.25		0.12	12344		
	7.5	191				0.13	11143		0.55
	8.6	167		0.37		0.15	9743		
	0.12	11712				0.17	8443		0.75
	0.13	10573				0.20	7307		
	1.16	8784				0.22	6447		
8000	0.19	7479	R 137R77 RF137R77	0.18		0.26	5568	R 147R77 RF147R77	0.37
	0.22	6412		0.25		0.30	4815		
	0.24	5834				0.33	4325		0.55
	0.28	5001		0.37		0.39	3669		
	0.32	4364				0.44	3228		0.75
	0.35	3928				0.50	2833		




R 系列斜齿轮硬齿面减速机

M2max Nm	输出转速 1/min	传动比 i	机 型 号 Type	功 率 kW/4p	M2max Nm	输出转速 1/min	传动比 i	机 型 号 Type	功 率 kW/4p	
13000	0.56	2555	R 147R77 RF147R77	1.1	R 167R107 RF167R107	4.9	295		11	
	0.65	2211				5.2	281			
	0.73	1951				6.1	238			
	0.84	1705		1.5		7.0	208		15	
	0.93	1536				5.1	287			11
	1.1	1329				5.5	260			15
	1.2	1166		6.5		224				
	1.4	1029		7.5		195				
	1.6	889								
	1.8	784		3						
	2.1	695	R 147R87 RF147R87	4						
	2.4	607								
	2.6	547								
	3.0	480		5						
	2.7	540		4						
	3.1	462		5.5						
	3.3	432								
	3.9	373			7.5					
	4.4	330								
	6.8	216		11						
18000	0.05	27001	R 167R97 RF167R97	0.55						
	0.06	22482								
	0.07	20002								
	0.08	17361								
	0.09	15446								
	0.10	14051								
	0.12	11812								
	0.13	10509								
	0.14	9754								
	0.18	7749							1.1	
	0.20	6894								
	0.23	6069								
	0.26	5399		0.75						
	0.30	4709								
	0.33	4182								
	0.37	3739		1.1						
	0.54	2657		1.5						
	0.61	2333								
	0.69	2085								
	0.76	1877		2.2						
	0.86	1670								
	0.98	1456								
	1.1	1296		3						
	1.3	1137								
	1.4	1012								
	1.7	872		4						
	1.9	770								
	2.2	664								
	2.5	578		5.5						
	2.8	510		7.5						
	3.3	438								
	3.8	380								
	4.3	338		7.5						
	4.8	307								
	5.2	282								


R 系列斜齿轮硬齿面减速机



RX37


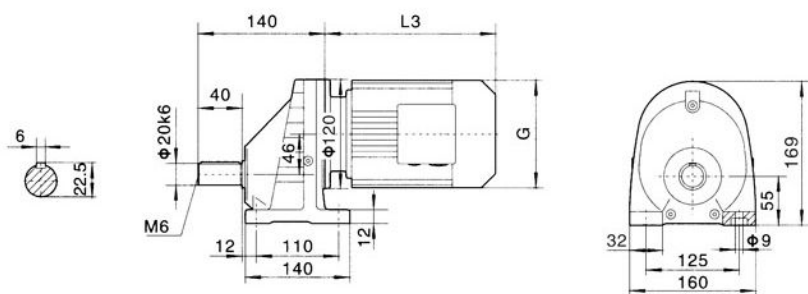


RXD37

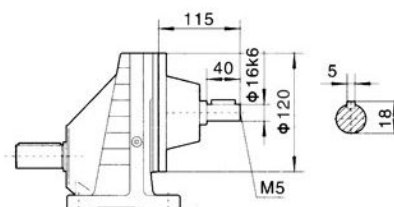

电机需方配时或配特殊电机时需加联接法兰

RXF37

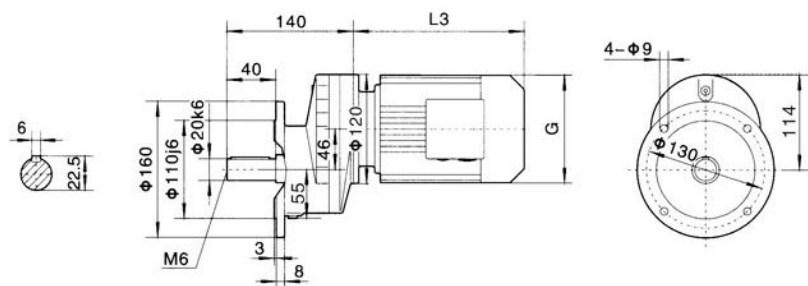

注：其余尺寸见相应的结构形式


Y ₂ 电机机座号	63	71	80	90S	
功率/4P(kw)	0.18	0.25 0.37	0.55 0.75	1.1	
L3	223	236	264	301	
G	130	145	175	195	
L2	71	71	71	71	

注：“RX..”表示RX、RXF




R 系列斜齿轮硬齿面减速机


RX57

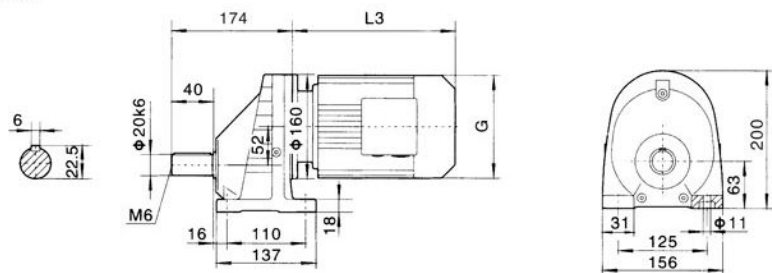


RXD57



RXF57

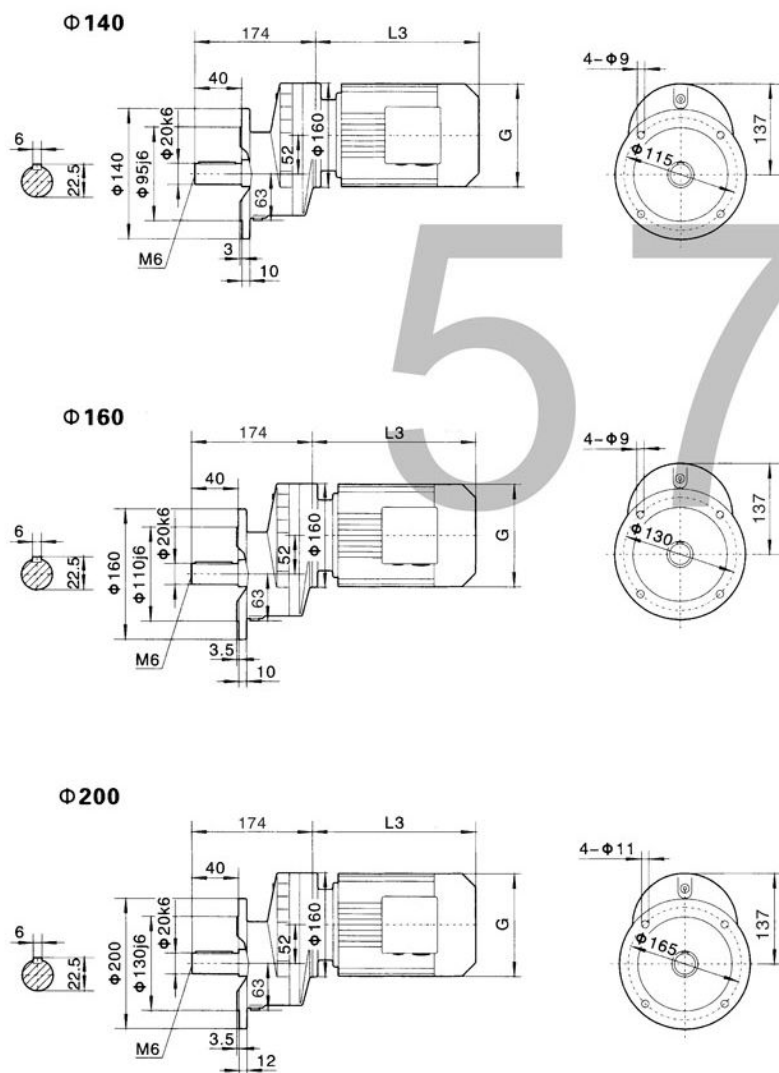

电机需方配时或配特殊电机时需加联接法兰



注：其余尺寸见相应的结构形式


Y ₂ 电机机座号	63	71	80	90S	90L	100	112M	132S	
功率/4P(kw)	0.18	0.25 0.37	0.55 0.75	1.1	1.5	2.2 3.0	4.0	5.5	
L3	223	245	278	304	328	350	380	425	
G	130	145	175	195	195	215	240	275	
L2	81	81	81	81	81	93	93	101	

注：“RX..”表示RX、RXF


R 系列斜齿轮硬齿面减速机




RX67

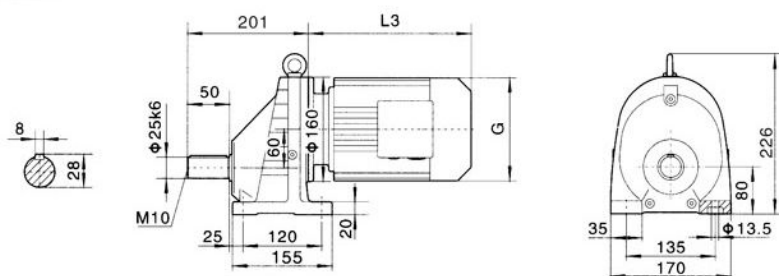


RXD67



RXF67

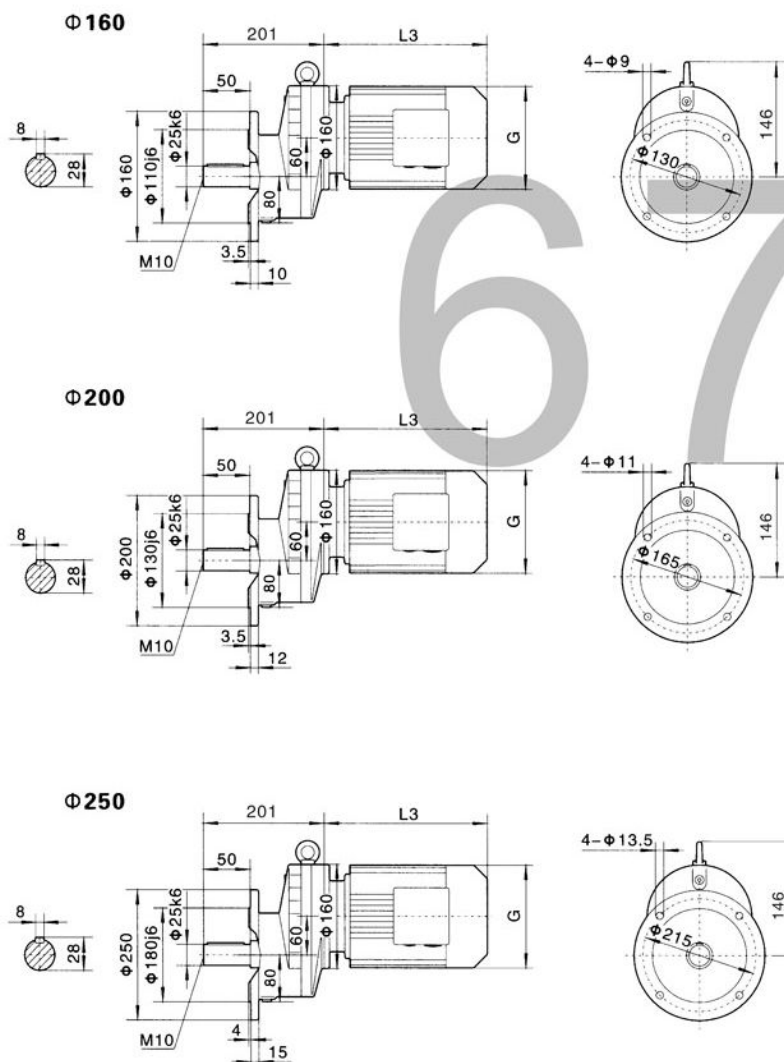


电机需方配时或配特殊电机时需加联接法兰




注：其余尺寸见相应的结构形式

Y ₂ 电机机座号	63	71	80	90S	90L	100	112M	132S	132M	
功率/4P(kw)	0.18	0.25 0.37	0.55 0.75	1.1	1.5	2.2 3.0	4.0	5.5	7.5	
L3	223	245	278	304	328	350	380	425	461	
G	130	145	175	195	195	215	240	275	275	
L2	81	81	81	81	81	93	93	101	101	

注：“RX..”表示RX、RFX



RX77




注：“RX..”表示RX、RXF


R 系列斜齿轮硬齿面减速机



RX87

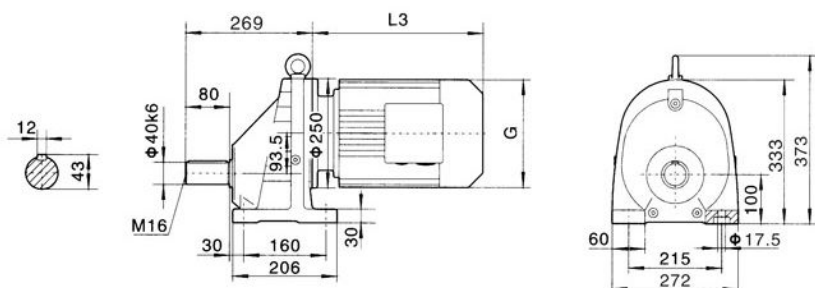


RXD87




RXF87


$\Phi 250$

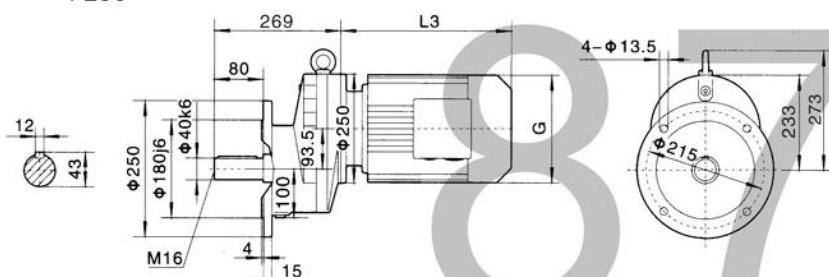

$\Phi 300$

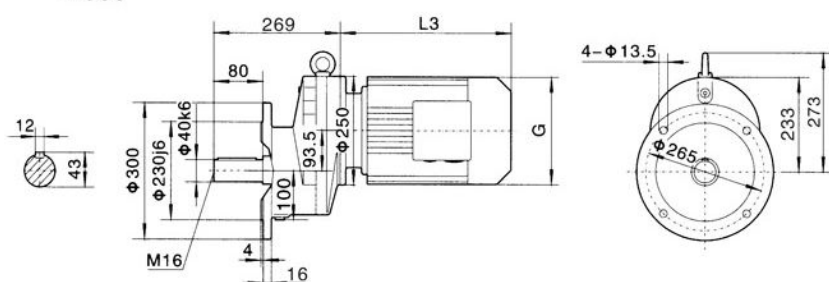

电机需方配时或配特殊电机时需加联接法兰



注：其余尺寸见相应的结构形式


Y ₂ 电机机座号	100	112M	132S	132M	160M	160L	180M	180L	
功率/4P(kw)	3.0	4.0	5.5	7.5	11	15	18.5	22	
L3	351	380	425	461	524	547	583	616	
G	215	240	275	275	330	330	380	380	
L2	71	71	101	101	126	126	126	126	

注：“RX..”表示RX、RXF




R 系列斜齿轮硬齿面减速机



RX97

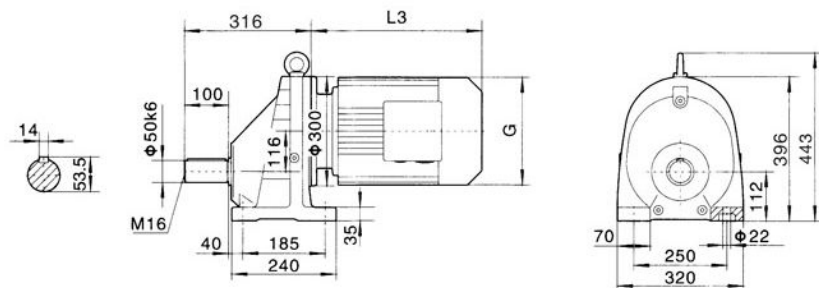


RXD97

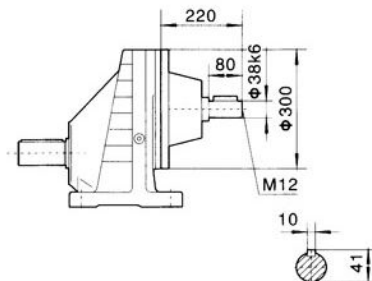

RXF97

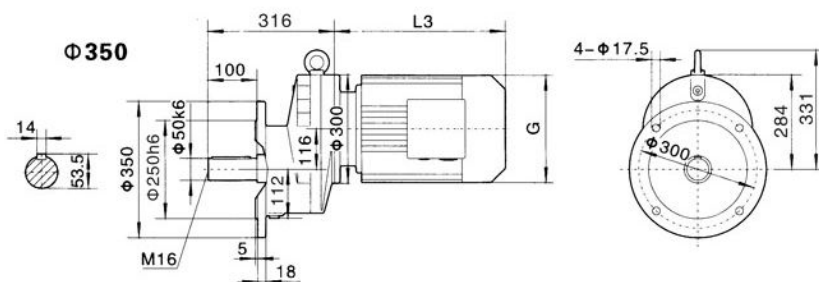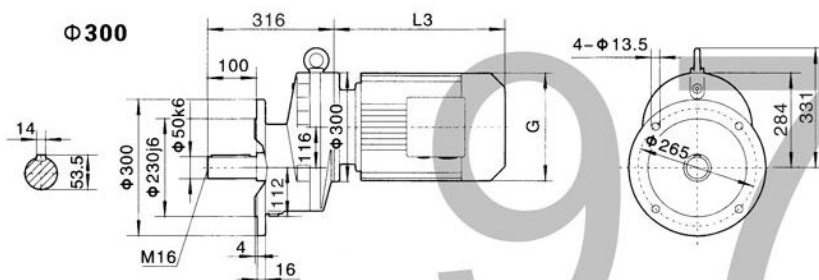

电机需方配时或配特殊电机时需加联接法兰



注：其余尺寸见相应的结构形式


Y ₂ 电机机座号	132S	132M	160M	160L	180M	180L	200	
功率/4P(kw)	5.5	7.5	11	15	18.5	22	30	
L3	425	461	524	547	555	588	654	
G	275	275	330	330	380	380	420	
L2	101	101	126	126	126	126	126	

注：“RX..”表示RX、RFX


R 系列斜齿轮硬齿面减速机




RX107

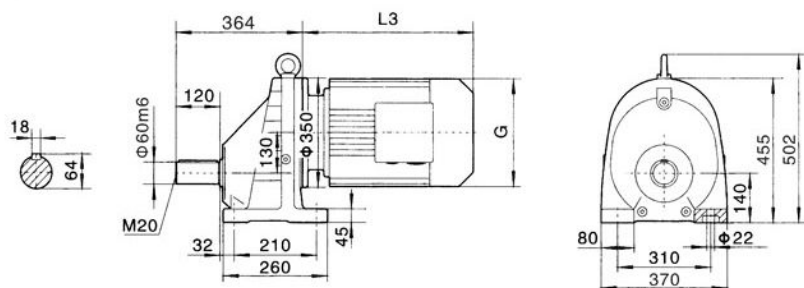


RXD107

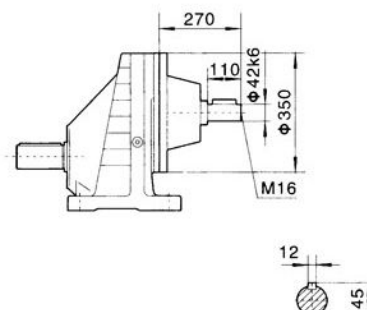

RXF107

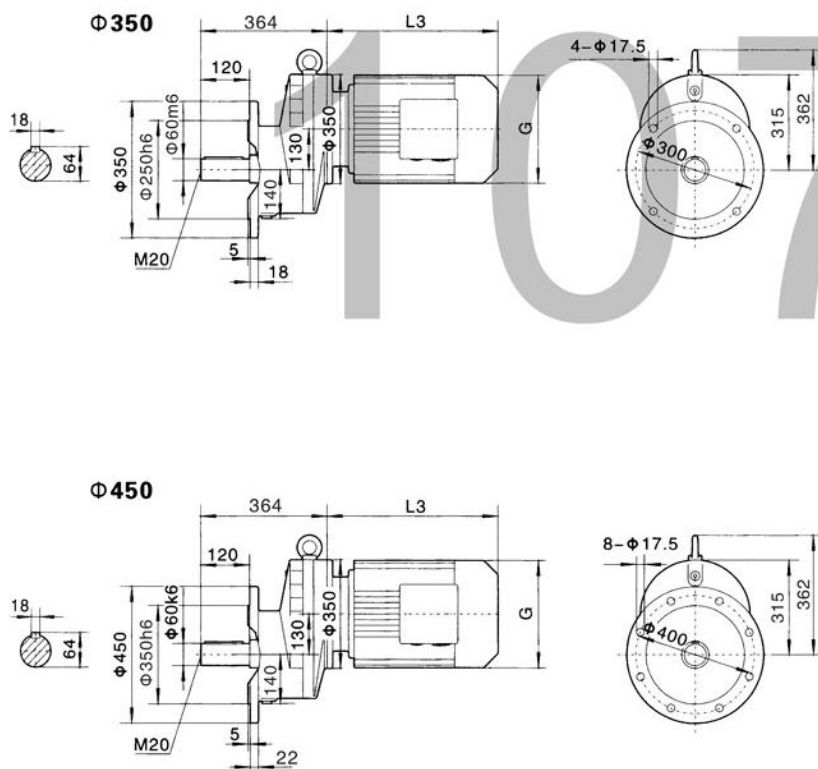


电机需方配时或配特殊电机时需加联接法兰



注：其余尺寸见相应的结构形式

Y ₂ 电机机座号	132M	160M	160L	180M	180L	200	225S	225M	
功率/4P(kw)	7.5	11	15	18.5	22	30	37	45	
L3	422	504	519	555	588	654	680	702	
G	275	330	330	380	380	420	470	470	
L2	101	126	126	126	126	132	132	132	

注：“RX..”表示RX、RFX

[illegible]

The technical drawing shows two views of the pump assembly:

- Side View (Left):** Shows the pump body with dimensions: total length 400, mounting bracket width 140, distance from base to top of bracket 163, bracket height 17, base thickness 5, and bottom flange diameter 20. The pump shaft has a diameter of $\Phi 450$. The motor housing has a length dimension L3.
- Front View (Right):** Shows the circular face of the pump with a central shaft hole of diameter $\Phi 400$, eight mounting holes around the perimeter labeled "8- $\Phi 17.5$ ", and overall diameters of 389 and 464.

注：其余尺寸见相应的结构形式

Technical drawing of the 3000 series motor showing front and side views with dimensions. The front view (left) shows a motor with a total width of 477 mm, a mounting flange diameter of $\Phi 90\text{m6}$, and a base width of 400 mm. The side view (right) shows a total height of 770 mm and a base width of 620 mm. A detail view of the mounting flange shows a 25 mm diameter hole and a 95 mm diameter hole.

电机需方配时或配特殊电机时需加联接法兰

[illegible]

注：其余尺寸见相应的结构形式

注：“RX..”表示RX、RXF

Technical drawing of the 1000W motor showing front, side, and top views with dimensions:

- Front View (Left):** Shows the motor's profile. Key dimensions include a total width of 169, a mounting flange diameter of $\Phi 120$, and a base width of 131. The mounting hole is $\Phi 20 \times 6$ with a 40mm distance from the center. The base has a 18mm wide section and a 110mm wide section.
- Side View (Right):** Shows the motor's length. Key dimensions include a total length of 135, a mounting flange diameter of $\Phi 120$, and a base width of 131. The mounting hole is $\Phi 20 \times 6$ with a 40mm distance from the center. The base has a 18mm wide section and a 110mm wide section.
- Top View (Bottom):** Shows the motor's top. Key dimensions include a total width of 135, a mounting flange diameter of $\Phi 120$, and a base width of 131. The mounting hole is $\Phi 20 \times 6$ with a 40mm distance from the center. The base has a 18mm wide section and a 110mm wide section.

Technical drawing of a motor showing dimensions L1 and L2. L1 is the total length, and L2 is the length of the motor body.

RF17

[illegible]


Y ₂ 电机机座号	63	71		80								
功率/4P(kw)	0.18	0.25	0.37	0.55	0.75							
L3	235	245		278								
G	130	145		175								
L2	71	71		71								

— 169 —




R 系列斜齿轮硬齿面减速机


R27

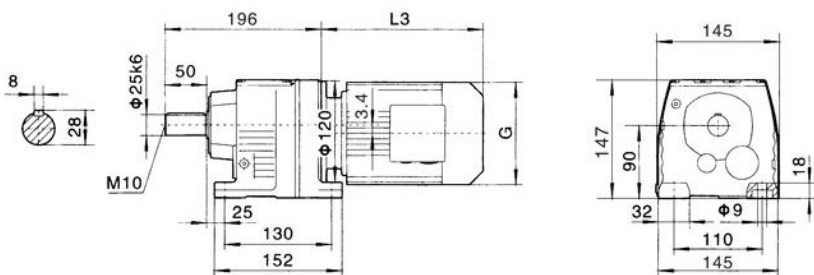


电机需方配时或配特殊电机时需加联接法兰




RF27

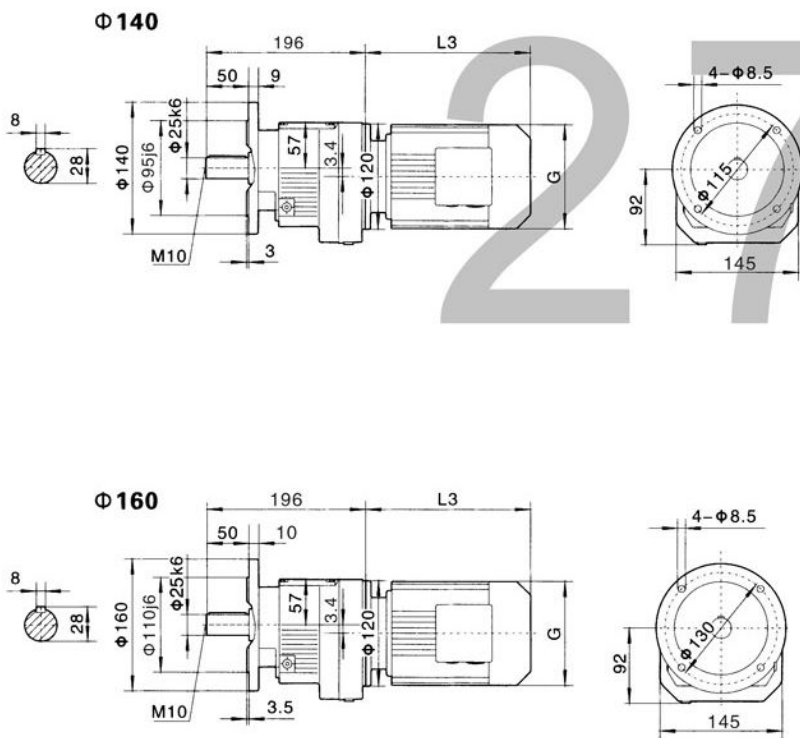

RD27



R..27R17

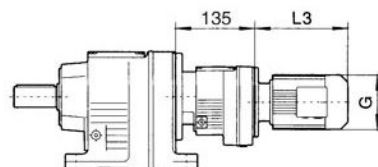

注：其余尺寸见相应的结构形式


Y ₂ 电机机座号	63	71	80	90S	90L	100		
功率/4P(kw)	0.18	0.25 0.37	0.55 0.75	1.1	1.5	2.2 3.0		
L3	235	245	278	304	328	340		
G	130	145	175	195	195	215		
L2	71	71	71	71	71	93		

注：“R..”表示R、RF


R 系列斜齿轮硬齿面减速机




R37

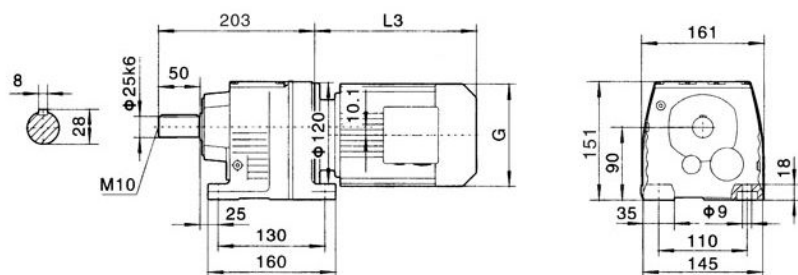


电机需方配时或配特殊电机时需加联接法兰




RF37

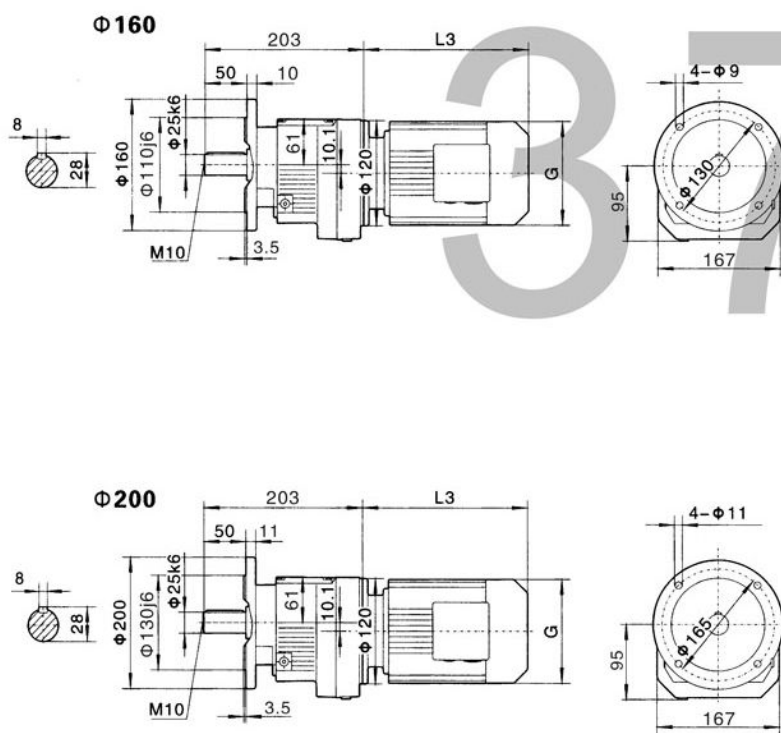

RD37



R..37R17

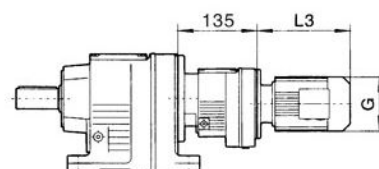

注：其余尺寸见相应的结构形式


Y ₂ 电机机座号	63	71		80	90S	90L	100L		
功率/4P(kw)	0.18	0.25	0.37	0.55	0.75	1.1	1.5	2.2	3.0
L3	235	245		278	304	328	340		
G	130	145		175	195	195	215		
L2	71	71		71	71	71	93		

注：“R..”表示R、RF




R 系列斜齿轮硬齿面减速机


R47

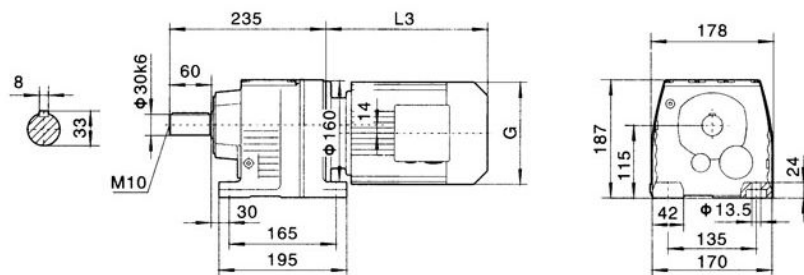


电机需方配时或配特殊电机时需加联接法兰




RF47

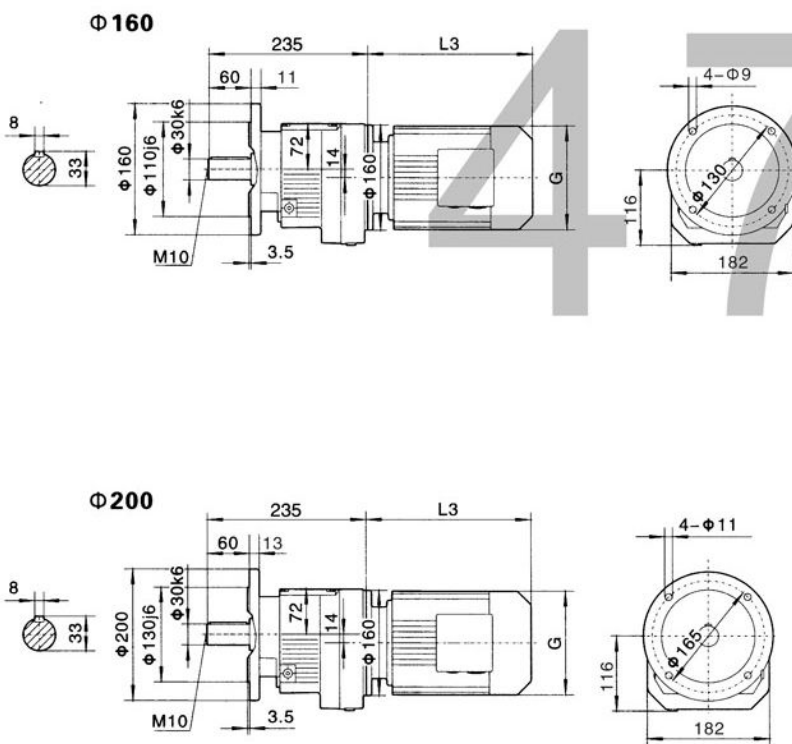

RD47



R..47R37

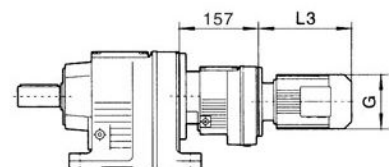

注：其余尺寸见相应的结构形式


Y ₂ 电机机座号	63	71	80	90S	90L	100	112M	132S	
功率/4P(kw)	0.18	0.25 0.37	0.55 0.75	1.1	1.5	2.2 3.0	4.0	5.5	
L3	223	245	278	304	328	350	380	425	
G	130	145	175	195	195	215	240	275	
L2	81	81	81	81	81	93	93	101	

注：“R..”表示R、RF


R 系列斜齿轮硬齿面减速机




R57

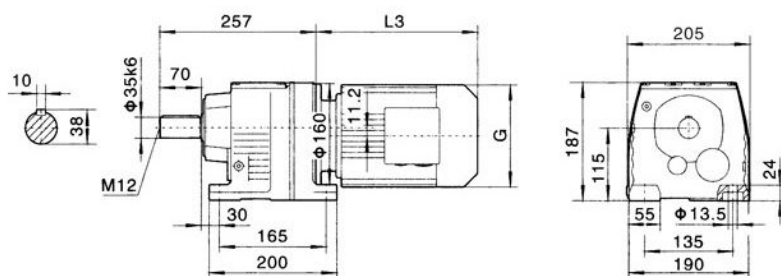


电机需方配时或配特殊电机时需加联接法兰




RF57

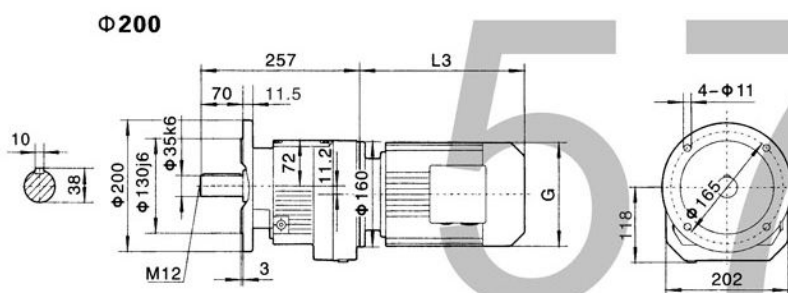


RD57



Phi 250

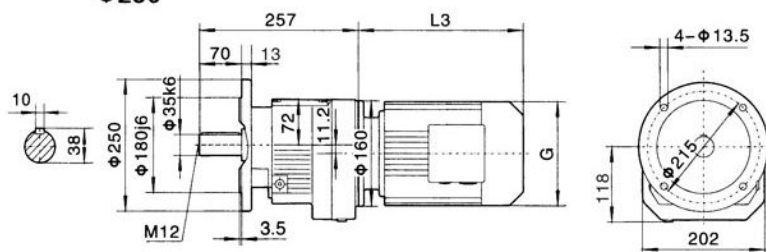


R..57R37

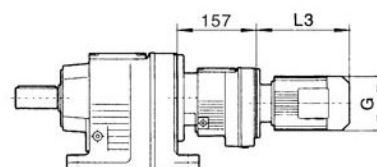


注：其余尺寸见相应的结构形式

Y ₂ 电机机座号	63	71	80	90S	90L	100L	112M	132S	132M	
功率/4P(kw)	0.18	0.25 0.37	0.55 0.75	1.1	1.5	2.2 3.0	4.0	5.5	7.5	
L3	223	245	278	304	328	350	380	425	461	
G	130	145	175	195	195	215	240	275	275	
L2	81	81	81	81	81	93	93	101	101	


注：“R..”表示R、RF




R67



RF67



R..67R37

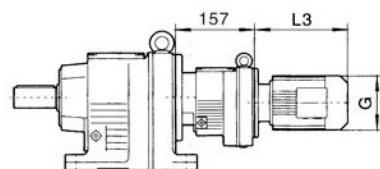


注：“R..”表示R、RF


R系列斜齿轮硬齿面减速机



R77

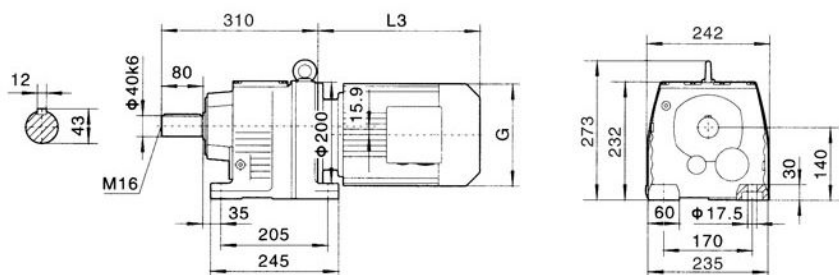


电机需方配时或配特殊电机时需加联接法兰




RF77


Φ250

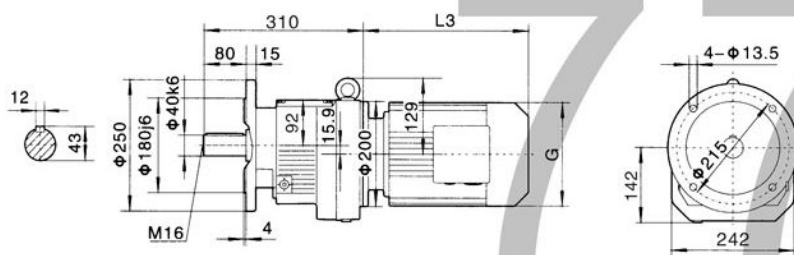


RD77



Φ300

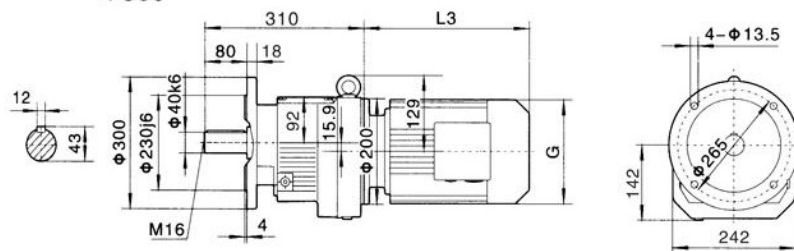

R..77R37

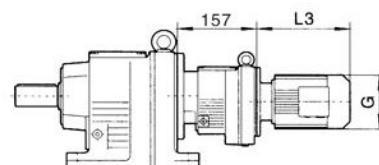

注：其余尺寸见相应的结构形式


Y ₂ 电机机座号	63	71	80	90S	90L	100L	112M	132S	132M	160M
功率/4P(kw)	0.18	0.25 0.37	0.55 0.75	1.1	1.5	2.2 3.0	4.0	5.5	7.5	11
L3	223	233	278	304	328	350	380	425	461	524
G	130	145	175	195	195	215	240	275	275	330
L2	81	81	81	81	81	93	93	101	101	126

注：“R..”表示R、RF




R 系列斜齿轮硬齿面减速机


R87

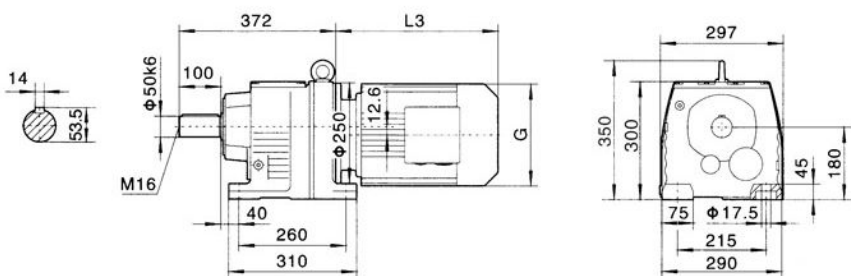


电机需方配时或配特殊电机时需加联接法兰




RF87

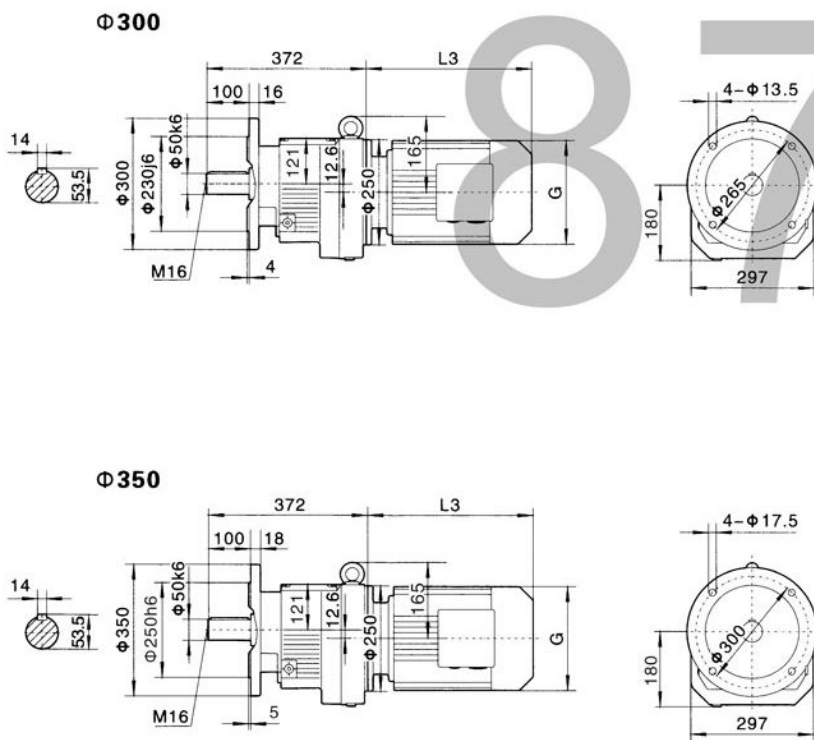

RD87



R..87R37

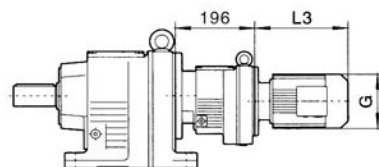

注：其余尺寸见相应的结构形式


Y2电机机座号	80		90S	90L	100		112M	132S	132M	160M	160L	180M	180L
功率/4P(kw)	0.55	0.75	1.1	1.5	2.2	3.0	4.0	5.5	7.5	11	15	18.5	22
L3	246		280	304	350		380	425	461	524	547	583	616
G	175		195	195	215		240	275	275	330	330	380	380
L2	86		86	86	71		71	101	101	126	126	126	126

注：“R..”表示R、RF


R系列斜齿轮硬齿面减速机




R97

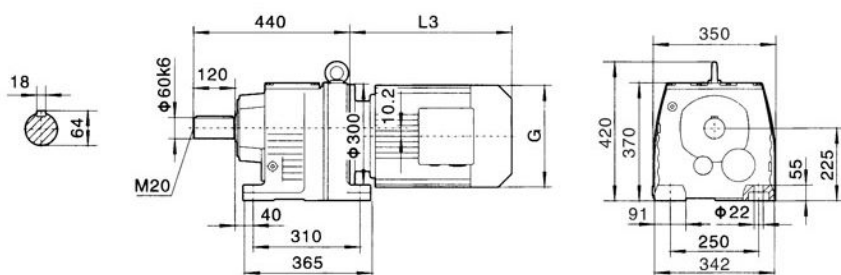


电机需方配时或配特殊电机时需加联接法兰




RF97

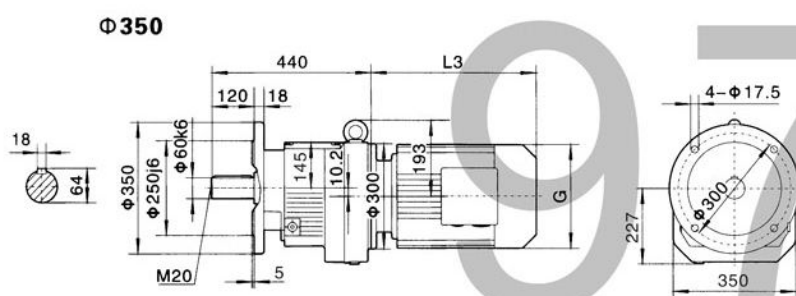


RD97

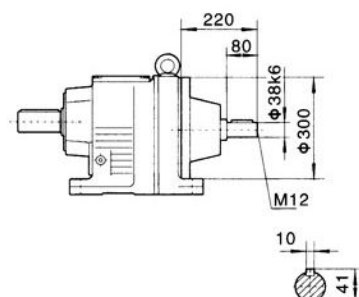

Φ450

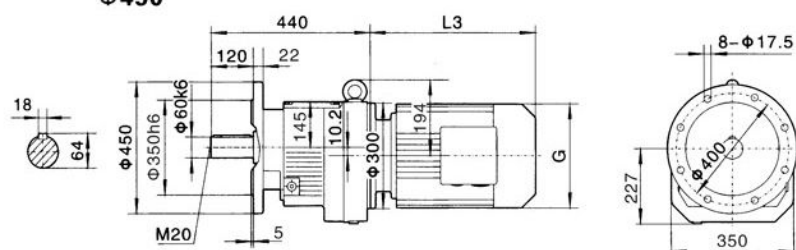

R..97R57

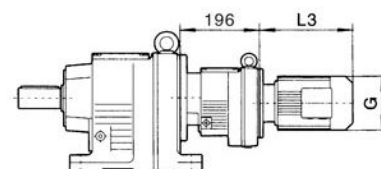

注：其余尺寸见相应的结构形式


Y2电机机座号	80		90S	90L	100		112M	132S	132M	160M	160L	180M	180L	200
功率/4P(kw)	0.55	0.75	1.1	1.5	2.2	3.0	4.0	5.5	7.5	11	15	18.5	22	30
L3	246		280	304	315		334	425	461	524	547	555	588	654
G	175		195	195	215		240	275	275	330	330	380	380	420
L2	86		86	86	101		101	101	101	126	126	126	126	132

注：“R..”表示R、RF




R 系列斜齿轮硬齿面减速机


R107

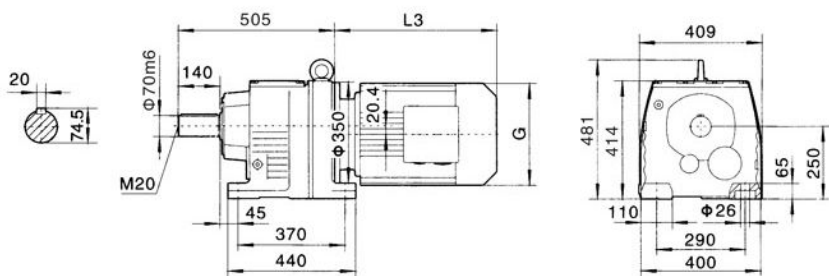


电机需方配时或配特殊电机时需加联接法兰




RF107

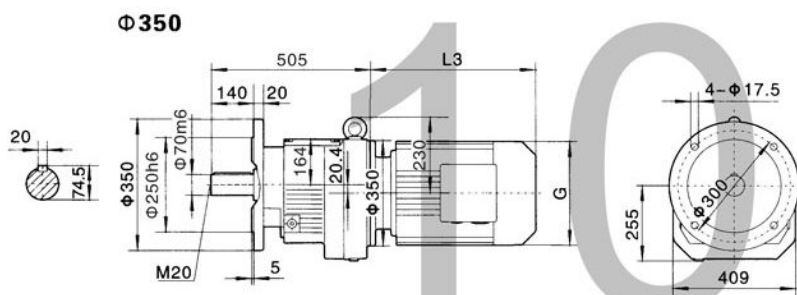


RD107



R..107R77

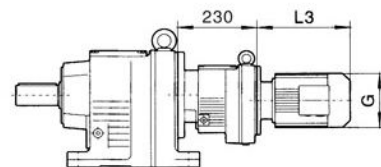

注：其余尺寸见相应的结构形式

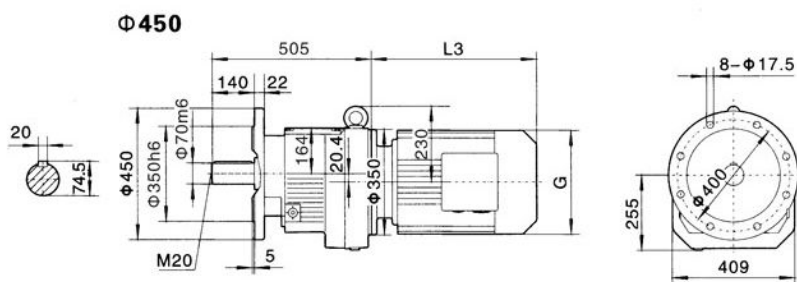

Y ₂ 电机机座号	100	112M	132S	132M	160M	160L	180M	180L	200	225S	225M	
功率/4P(kw)	2.2 3.0	4.0	5.5	7.5	11	15	18.5	22	30	37	45	
L3	318	334	386	422	504	519	555	588	654	680	702	
G	215	240	275	275	330	330	380	380	420	470	470	
L2	101	101	101	101	126	126	126	126	132	132	132	

注：“R..”表示R、RF

[illegible]

Technical drawing of a motor showing dimensions L1 and L2. L1 is the total length, and L2 is the length of the motor body.

Technical drawing of the pump assembly showing dimensions: 307, 110, 55mm, 400, M20, 16, and 59.

Technical drawing of the motor assembly showing dimensions: 230, L3, and G.

RF137

[illegible][illegible]


Y2电机机座号	132S	132M	160M	160L	180M	180L	200	225S	225M	250	
功率/4P(kw)	5.5	7.5	11	15	18.5	22	30	37	45	55	
L3	388	424	476	519	555	588	654	680	702	771	
G	275	275	330	330	380	380	420	470	470	510	
L2	126	126	132	132	132	132	132	143	143	174	

—179—




R 系列斜齿轮硬齿面减速机


R147

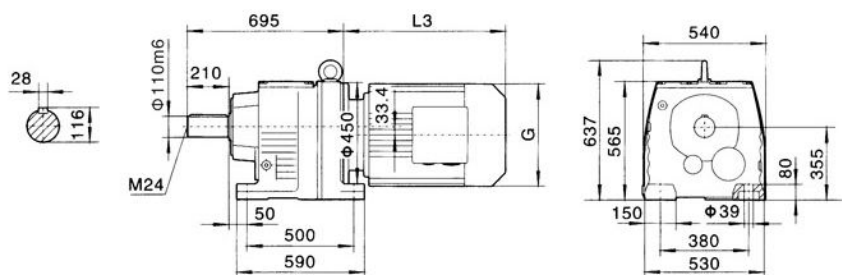


电机需方配时或配特殊电机时需加联接法兰




RF147

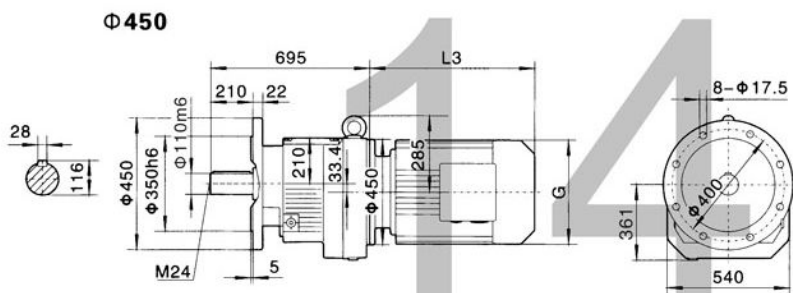

RD147



R..147R87(R77)

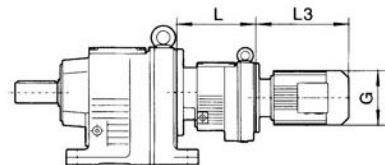

	R..147R77组合	R..147R87组合
L	226	275

注：其余尺寸见相应的结构形式


Y ₂ 电机机座号	160M	160L	180M	180L	200	225S	225M	250	280S	280M	
功率/4P(kw)	11	15	18.5	22	30	37	45	55	75	90	
L3	567	602	583	616	654	674	696	775	845	845	
G	330	330	380	380	420	470	470	510	580	580	
L2	132	132	132	132	132	143	143	174	174	174	

注：“R..”表示R、RF


R 系列斜齿轮硬齿面减速机



R167

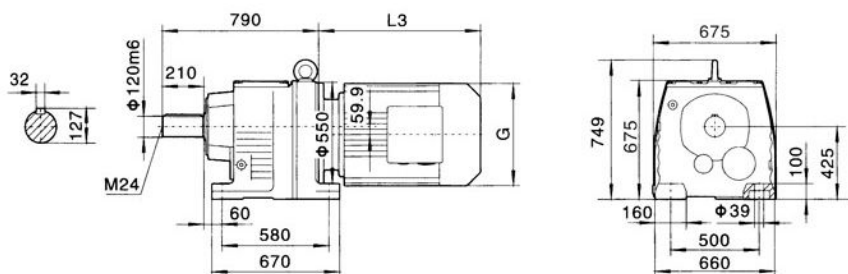


电机需方配时或配特殊电机时需加联接法兰




RF167


Φ550

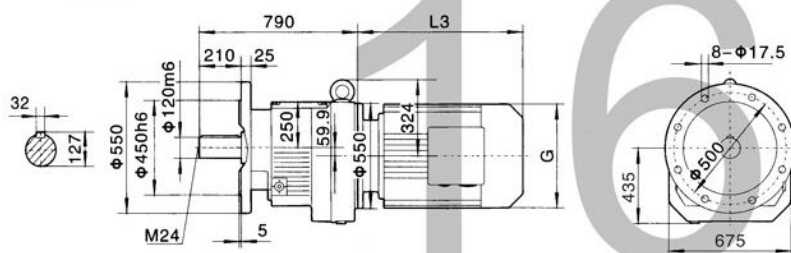


Φ660

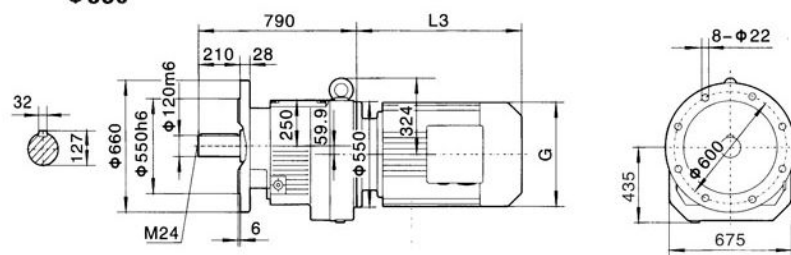

RD167



R..167R97(R107)

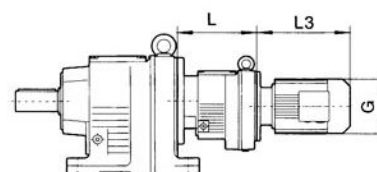

	R..167R97组合	R..167R107组合
L	320	370

注：其余尺寸见相应的结构形式

Y ₂ 电机机座号	160M	160L	180M	180L	200	225S	225M	250	280S	280M	315S	315M	315L
功率/4P(kw)	11	15	18.5	22	30	37	45	55	75	90	110	132	160
L3	567	602	635	666	642	669	691	770	828	879	1100	1130	1360
G	330	330	380	380	420	470	470	510	580	580	645	645	645
L2	143	143	143	143	143	143	143	113	113	113	113	145	145

注：“R..”表示R、RF